



Infiniti® K Series Outdoor Tankless Gas Condensing Water Heater

Features

- ENERGY STAR® Certified.
- Certified Green Product[™] by the Green Restaurant Association.
- SRT™ Scale Reduction Technology—Significantly reduces the incidence of scale build-up known to result in poor performance, additional maintenance, and premature component or product failure.
- STEADISET® Technology—Virtually eliminates cold water sandwich without the need for an internal buffer tank and recirculation pump.
- Self-Calibrating Fan and Gas Valve—Automatically configures air fuel ratio for flue length, gas type, and altitude - without a combustion analyzer.
- Modulation—Segmented burner with 22:1 turn down ratio.

Additional Details

- Complies with the latest Ultra-Low NOx requirement (14 ng/J NOx limit).
- Built-in Digital Control—(100-140°F) (38°C-60°C).
- Active Bypass—Achieves superior temperature stability (±2°F) (±1°C).
- External Recirculation Pump Wiring-Installed. Built-in controls provides precise operation of external recirculation pump with, or without, additional external temperature sensor (Recirculation pump sold separately).
- Built In Freeze Protection—Activates automatically when the water heater is plugged in.
- Heat Exchanger Primary Copper with Secondary Stainless Steel (316L) heat exchanger helps maximize life and minimize scale build-up.
- Intelligent Cascading Kit (Optional)—Up to 24 units can be connected together with ease.
- Flushing Condensate Trap.
- Optional Condensate Neutralizer Kit—p/n A2123601.
- Easy Installation and Service Features:
 - Gas Connection Flexibility 1/2" (13mm), 3/4" (19mm), or 1" (25mm) connections permitted (refer to I&O manual for details).
 - Space Saving Installation Compact size for tight installations.
 - Inlet Water Filter External access for easy maintenance.

















Infiniti® K Series Outdoor Tankless Gas Condensing Water Heater



SPECIFICATIONS


Natural Gas

These water heaters meet or exceed all or portions of (where applicable) the minimum efficiency requirements of ASHRAE Standard 90.1 (latest edition).

Model Number	Input (BTU/Hr.)	GPM Flow Rate at °F Temperature Rise			Uniform Energy Factor	Minimum Water Flow	Maximum Temperature Setting	Approx. Shipping Weight
		45°F	75°F	90°F		GPM		lbs.
RTG-K-160-N2	9,000 - 160,000	7.0	4.2	3.5	0.95	0.45	140°F	73
RTG-K-199-N2	9,000 - 199,000	8.7	5.2	4.4	0.95	0.45	140°F	79
Model Number	Input (kW)	LPM Flow Rate at °C Temperature Rise			Uniform Energy Factor	Minimum Water Flow	Maximum Temperature Setting	Approx. Shipping Weight
		25°C	41.7°C	50°C		LPM		kg.
RTG-K-160-N2	2.6 - 46.64	26.7	15.9	13.2	0.95	1.7	60°C	33
RTG-K-199-N2	2.6 - 58.3	32.9	19.6	16.6	0.95	1.7	60°C	36

Propane (LP) Models are not available for order from the factory. All Natural Gas products shipped can be converted to Propane (LP) without the purchase of an additional kit. Requires an electrical power supply from a 120VAC 60Hz., properly rated receptacle and must be properly grounded. Power supply cord provided.

Intelligent Cascading Kit: Part No. 7736502750 (One for each additional water heater)

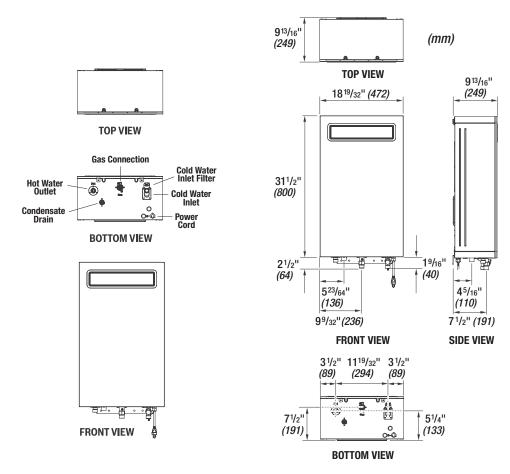

GENERAL:

All potable water connections are 3/4" (19mm) NPT. Gas connections are 3/4" (19mm). Bradford White recommends consulting the Installation and Operations Manual (IOM) for proper gas line sizing based upon the installation specifics.

Suitable for Water (Potable) Heating and Space Heating. Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into this system. This unit may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



Sales: 800-523-2931

24/7 Technical Support: 800-334-3393 • Email TechServ@bradfordwhite.com

©2025, Bradford White Corporation, USA. All rights reserved.

