



Residential Energy Saver Electric-Tabletop

Meets NC Code Requirements

Features:



- **High density fiberglass insulation**—a thick wall of fiberglass completely covers the sides and top of tank, saving energy by retarding loss of heat.
- **Glass-lined tank**—this exclusive glass formulation is applied under pressure to completely cover the tank interior for years of extra service. Protects against rust and corrosion. Will not crack or peel.
- **Protective magnesium anode rod**—provides added protection against corrosion for long trouble-free service.
- **Special intake dip tube**—directs incoming cold water to bottom of tank, eliminates mixing of cold water with hot.
- **Fully automatic controls**—fast acting surface-mount thermostats for automatic temperature control. Factory installed sensitive manual reset energy cut-off for safety to prevent overheating.
- **Direct heat transfer with immersed elements**—transfers heat directly and efficiently to the water.
- **T&P relief valve**—factory installed.
- **Six or ten year limited warranty on steel tank**—heavy gauge steel automatically formed, rolled and welded to assure a continuous seam for glass lining. Each tank is tested to insure quality.
- **Six year limited warranty on parts.**



Residential Energy Saver Electric-Tabletop

Energy Saver Models

These water heaters meet or exceed the performance standards established under ASHRAE 90. 1b (current edition).
Meets NAECA requirements.

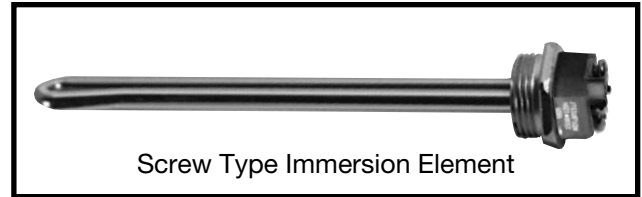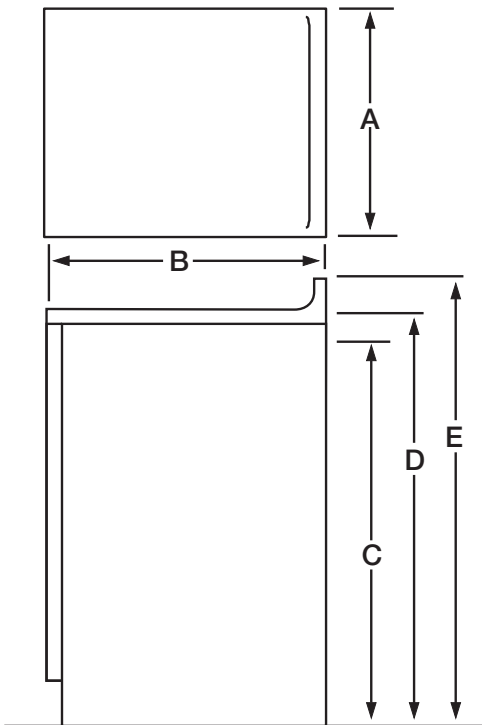

Screw Type Immersion Element

Tabletop Electric Models CEC Listed.

Model	Gallon Capacity	A B Jacket Dimensions	C Floor to Water Conn.	D Jacket Height	E Overall Height	GPH Recovery 90°F. Rise	Approx. Shipping Weight (Lbs.)
J-I-40TT6DS	38	24" x 25"	33 $\frac{1}{4}$ "	36"	40"	20	152

Note: The Tabletop Heaters are built standard to meet North Carolina Code and will be wired inter-locking (non-simultaneous) 240 volt with 4500 watt elements. Requires a 30 Amp breaker.

General

All models UL listed. All water connections $\frac{3}{4}$ " NPT. All electrical connections $\frac{3}{4}$ ".
All models certified at 300 psi test pressure, 150 psi working pressure. Change suffix number "6" to "10" for warranty identification.

6-Year Limited Warranty on Component Parts

BRADFORD WHITE CORPORATION has a 6-year warranty on replaceable parts—thermostat, elements, dip tube, drain valve. These quality components are manufactured for us by industry leaders and will be replaced in the event of failure during the parts warranty period (exclusive of shipping and re-installation cost.)§

6 or 10-Year Limited Tank Warranties

BRADFORD WHITE CORPORATION LIMITED WARRANTY: Protects your investment in a quality glass-lined water heater. If the tank leaks for reasons of faulty materials, workmanship, or corrosion within the warranty period, the heater will be replaced with a comparable heater of our manufacture (exclusive of shipping and re-installation cost.)§

§ Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater. Indicated warranties apply to USA, Canada and Puerto Rico installations.


BRADFORD WHITE®
CORPORATION

Ambler, PA

For U.S. and Canada field service, contact your professional installer or local Bradford White sales representative.

Sales/800-523-2931
Fax/215-641-1670

Technical Support/800-334-3393
Fax/269-795-1089

Warranty/800-531-2111
Fax/269-795-1089

International:
Telephone/215-641-9400
Telefax/215-641-9750

Fax on Demand:
888-538-7833
www.bradfordwhite.com


BRADFORD WHITE-CANADA™ INC.
Mississauga, ON

Sales/Technical Support
866-690-0961
905-238-0100

Fax/905-238-0105

www.bradfordwhitecanada.com