

Large Volume Carbon Steel Jacketed and Insulated Tanks Commercial Storage

Features

- **Vitraglas® Lining with Microban®**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban® antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.
 - Vitraglas® (5-year Limited Warranty) & Double Vitraglas® (10-year Limited Warranty).
- **Optional Hydrojet® HC**—Stainless steel, dielectrically isolated recirculation tube minimizes turbulence and directs the hottest water to the top of the tank to maximize hot water delivery.
- **Vertical or Horizontal Construction**—Horizontal models require two saddles and have two additional 3" (76mm) NPT fittings.



Photo is of NV303JG5A



Additional Details

- **All Tanks Are Constructed and Certified**—In accordance with ASME Sect. IV, Part HLW for 125 PSI (862 kPa). 150 PSI (1034 kPa) is available as an option.
- **High Density Foam Insulation**—Covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Water Connections**—Two female NPT fittings are located on the front for ease of service and installation (reference chart for sizes). Additional size fittings are available as an option.
- **Optional Hand Hole Cleanout and Manway**—4"x 6" (102mmx152mm) diameter Hand Hole cleanout and 12"x16" (305mmx406mm) diameter Manway opening allow for removal of accumulated lime and sediment.
 - Manway standard on all tanks with a vessel diameter of 42" (1067mm) or greater.
- **Protective Anode Rods**—Provide added protection against corrosion for long-term, trouble-free service.
- **Steel Jacket**—Heavy gauge steel automatically formed, rolled, and welded.
- **One 3/4" (19mm) NPT Aquastat Fitting.**
- **Designed for Storage of Potable Water up to 180°F (82°C).**

Sample Specification:

The Carbon Steel storage tank shall be a Bradford White Jacketed and Insulated model with a nominal rated storage capacity of not less than _____ gallons (____ liters), and overall dimensions of _____ inches (____ cm.) in height, by _____ inches (____ cm.) in diameter. The tank shall be lined with Vitraglas® vitreous enamel with Microban® antimicrobial technology, and be built in accordance with ASME Boiler and Pressure Vessel Code ASME IV, Part HLW for 125 PSI (862 kPa) and so labeled, with a working pressure of _____ PSI (____ kPa). The Carbon Steel storage tank shall have Non-CFC foam insulation and carry a five (5) year limited warranty (ten (10) year limited warranty available on Double Vitraglas® lining).

GENERAL:

Front water connections 3" (76mm) NPT (except where noted). T&P tapping 1 1/4" (32mm) NPT. Aquastat tapping 3/4" (19mm) NPT. Most storage tanks are manufactured with convex heads and bases. Some manufacturers list the tank capacity as "Nominal." Generally, this is the theoretical capacity calculated assuming a tank was actually manufactured using a flat (instead of convex) head and base. Bradford White lists both Actual and Nominal capacity for comparison purposes.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



5-Year Limited Tank Warranties / 1-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. See complete copy of the warranty included with the heater for limitations.

Microban® antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban® is a registered trademark of Microban Products Company.

Large Volume Carbon Steel Jacketed and Insulated Tanks

Commercial Storage

SPECIFICATIONS

These storage tanks meet or exceed all or portions of (where applicable) the minimum efficiency requirements of ASHRAE Standard 90.1 (latest edition).

Model Number	Capacity (Gal.)		Capacity (Liters)		A	A	A	A	B	B	C	C	D	D	(Vert.)	(Horiz.)	(Vert.)	(Horiz.)	Required Manway
	Nominal	Actual	Nominal	Actual	Vertical Height (in.)	Horizontal Height (in.)	Vertical Height (mm.)	Horizontal Height (mm.)	Horizontal Length (in.)	Horizontal Length (mm.)	Diameter (in.)	Diameter (mm.)	Hot Water Outlet Conn. Size (in.)	Hot Water Outlet Conn. Size (mm.)	Shipping Weight (lbs.)	Shipping Weight (lbs.)	Shipping Weight (kg.)	Shipping Weight (kg.)	
N†193J*A	193	175	731	662	71	41	1803	1041	67	1702	34	864	2.5	64	548	570	249	259	—
N†229J*A	229	210	867	795	83	41	2108	1041	79	2007	34	864	2.5	64	613	613	278	278	—
N†260J*A	260	240	984	908	93	41	2362	1041	89	2261	34	864	2.5	64	673	755	305	342	—
N†303J*A	303	280	1147	1060	107	41	2718	1041	103	2616	34	864	2.5	64	700	728	318	330	—
N†318J*A	318	285	1204	1079	80	47	2032	1194	76	1930	40	1016	2.5	64	714	776	324	352	—
N†340J*A	340	320	1287	1211	119	41	3023	1041	115	2921	34	864	2.5	64	730	774	331	351	—
N†344J*A	344	310	1302	1173	86	47	2184	1194	82	2083	40	1016	2.5	64	782	827	355	375	—
N†375J*A	375	340	1420	1287	93	47	2362	1194	89	2261	40	1016	2.5	64	845	876	383	397	—
N†397J*A	397	360	1503	1363	98	47	2489	1194	94	2388	40	1016	2.5	64	894	935	406	424	—
N†449J*A	449	415	1700	1571	110	47	2794	1194	106	2692	40	1016	2.5	64	982	1016	445	461	—
N†486J*A	486	435	1840	1647	89	53	2261	1346	85	2159	46	1168	3	76	1024	1110	464	503	YES
N†502J*A	502	465	1900	1760	122	47	3099	1194	118	2997	40	1016	2.5	64	1106	1157	502	525	—
N†504J*A	504	453	1908	1715	92	53	2337	1346	88	2235	46	1168	3	76	1074	1049	487	476	YES
N†555J*A	555	515	2101	1949	134	47	3404	1194	130	3302	40	1016	2.5	64	1194	1260	542	572	—
N†558J*A	558	505	2112	1912	101	53	2565	1346	97	2464	46	1168	3	76	1168	1181	530	536	YES
N†572J*A	572	500	2165	1893	81	59	2057	1499	77	1956	52	1321	3	76	1381	1449	626	657	YES
N†630J*A	630	575	2385	2177	113	53	2870	1346	109	2769	46	1168	3	76	1292	1263	586	573	YES
N†658J*A	658	580	2491	2196	92	59	2337	1499	88	2235	52	1321	3	76	1539	1593	698	723	YES
N†702J*A	702	645	2657	2442	125	53	3175	1346	121	3073	46	1168	3	76	1392	1352	631	613	YES
N†752J*A	752	675	2847	2555	104	59	2642	1499	100	2540	52	1321	3	76	1653	1750	750	794	YES
N†774J*A	774	720	2930	2725	137	53	3480	1346	133	3378	46	1168	3	76	1498	1460	679	662	YES
N†834J*A	834	776	3157	2973	147	53	3734	1346	143	3632	46	1168	3	76	1587	1547	720	702	YES
N†846J*A	846	765	3202	2896	116	59	2946	1499	112	2845	52	1321	3	76	1803	1925	818	873	YES
N†940J*A	940	860	3558	3255	128	59	3251	1499	124	3150	52	1321	3	76	1947	2069	883	938	YES
N†981J*A	981	875	3713	3312	107	65	2718	1651	103	2616	58	1473	3	76	2200	2275	998	1032	YES
N†1119J*A	1119	1000	4236	3785	121	65	3073	1651	117	2972	58	1473	3	76	2400	2475	1089	1123	YES
N†1128J*A	1128	1040	4270	3937	149	59	3785	1499	145	3683	52	1321	3	76	2216	2407	1005	1092	YES
N†1174J*A	1174	1000	4444	3785	104	71	2642	1803	97	2464	64	1626	3	76	2600	2675	1179	1213	YES
N†1219J*A	1219	1110	4614	4202	129	65	3277	1651	127	3226	58	1473	3	76	2575	2650	1168	1202	YES
N†1327J*A	1327	1217	5023	4607	142	65	3607	1651	138	3505	58	1473	3	76	2750	2825	1247	1281	YES
N†1395J*A	1395	1245	5281	4713	122	71	3099	1803	118	2997	64	1626	3	76	3050	3125	1383	1417	YES
N†1689J*A	1689	1530	6394	5792	146	71	3708	1803	142	3607	64	1626	3	76	3500	3575	1586	1622	YES
N†1761J*A	1761	1538	6666	5822	106	81	2692	2057	100	2540	72	1829	3	76	2677	2942	1214	1334	YES
N†2061J*A	2061	1800	7802	6814	123	81	3124	2057	117	2972	72	1829	3	76	3035	3305	1377	1499	YES
N†2115J*A	2115	1865	8006	7060	126	81	3200	2057	120	3048	72	1829	3	76	3099	3369	1406	1528	YES
N†2256J*A	2256	2000	8540	7571	134	81	3404	2057	128	3251	72	1829	3	76	3267	3540	1482	1606	YES




- † V = Vertical, H = Horizontal
- * G5 = Vitraglas® (5-yr. Limited Warranty)
- * D10 = Double Vitraglas® (10-yr. Limited Warranty)
- * E1 = Epoxy (1-yr. Limited Warranty - Field Repairable)

Example: NV1219JG5A.

Tank Options:

- Hand Hole (4"x6") (102mm x 152mm) (Add suffix **-HH**)
- Manway (12"x16") (305mm x 406mm) (Add suffix **-MW**; not required on models with standard manway)
- Extra Tappings (1" - 4") (25mm - 102mm)
- Flanged Connections (3" - 10") (76mm - 254mm)
- 150 PSI (1034 kPa) working pressure (Add suffix **-150**)
- Hydrojet® HC (Part number 629-100191-000)
- Seismic Clips

* For other options consult factory

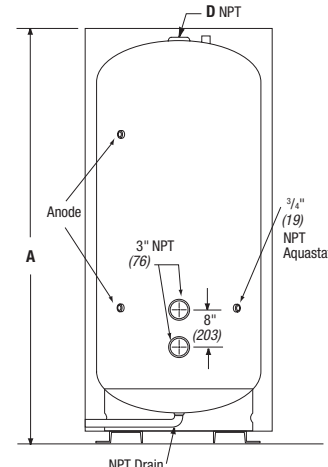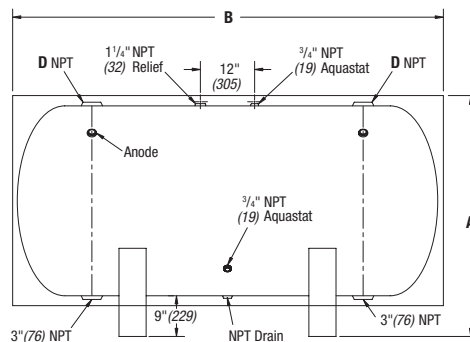

Sales: 800-523-2931

24/7 Technical Support: 800-334-3393 • Email: TechServ@bradfordwhite.com

Products made by Bradford White are manufactured in America using the finest materials and components from around the world. ©2026, Bradford White Corporation, USA. All rights reserved.

