

Residential PowerStor2™ Series Double-Wall Indirect Water Heater



Photo is of
DW-2-50-L

The PowerStor2™ Series Double-Wall Models feature:

- **Heat Exchanger**—Double wall 1½" (38mm) O.D. glass coated (Vitrageas® with Microban®) steel coil. The positive leak path between the two walls of the coil ensures the potable water will stay separate from the hydronic fluid.
- **Low Heat Exchanger Head Loss**—Up to 10 GPM (38L) flow, with less than 5 ft. (1.5m) of head loss. Greatly reduces the required pump size for heat exchange.
- **Vitrageas® Lining with Microban®**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban® antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.
- **Hydrojet® Total Performance System**—Sediment reducing device that also increases first hour delivery of hot water while minimizing temperature build-up in tank.
- **Fully Automatic Thermostat Controls**—Fast acting surface-mount thermostat for automatic temperature control.
- **Supply and Return Connections**—The ¾" (19mm) NPT female connections are located on the front for both the boiler supply and boiler return.
- **Insulation System**—2" (51mm) Non-CFC foam insulation covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Potable Water Connections**—¾" (19mm) NPT factory installed true dielectric fittings extend water heater life and eases installation.
- **Two Protective Anode Rods**—Provide added protection against corrosion for long trouble-free service.
- **Steel Tank**—Heavy gauge steel automatically formed, rolled and welded to assure a continuous seam for glass lining.
- **T&P Relief Valve**—Included.
- **Low Restriction Brass Drain Valve**—Durable tamper proof design.
- **AHRI Certified**—These water heaters are rated by the Air-Conditioning, Heating, and Refrigeration Institute to provide accurate performance data within the standards of the certification. This certification provides a recognized standard for proper comparison of hydronic appliances.

FEATURING:



Limited Lifetime Tank and Heat Exchanger Warranties / 6-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

Microban® antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban® is a registered trademark of Microban Products Company.

MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 5,682,666; 7,634,976; 5,660,165; 5,954,492; 6,056,542; 6,935,280; 5,372,185; 5,485,879; 5,574,822; 7,971,560; 7,992,526; 6,684,821; 7,334,419; 7,866,168; 7,270,087; 7,007,748; 5,596,952; 6,142,216; 7,699,026; 5,341,770; 7,337,517; 7,665,211; 7,665,210; 7,063,132; 7,063,133; 7,559,293; 7,900,589; 5,943,984; 8,082,888; 5,988,117; 7,621,238; 7,650,859; 5,761,379; 7,409,925; 5,277,171; 8,146,772; 7,458,341; 2,262,174. OTHER U.S. AND FOREIGN PATENT APPLICATIONS PENDING. CURRENT CANADIAN PATENTS: 2,314,845; 2,504,824; 2,108,186; 2,143,031; 2,409,271; 2,548,958; 2,112,515; 2,476,685; 2,239,007; 2,092,105; 2,107,012. PowerStor2™ Series®, Vitrageas® and Hydrojet® are registered trademarks of Bradford White® Corporation. Microban® is a registered trademark of Microban Products Company


Residential PowerStor2™ Series Double-Wall Indirect Water Heater

Double Wall Indirect Models

Meet or exceed ASHRAE 90.1 (latest edition)

Model Number	Capacity		A Floor to Heater Top	B Jacket Dia.	C Floor to T&P Conn.	D Floor to Water Conn.	E Floor to Exchanger Outlet	F Floor to Exchanger Inlet	G Floor to Thermostat	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	in.	in.	in.	in.	in.	in.	in.	lbs.
DW-2-40-L	37	31	41	22	34½	41½	5%	27½	11½	195
DW-2-50-L	43	36	46½	22	40%	47½	5%	27½	11½	205
DW-2-65-L	57	47	59	22	53½	60	5%	27½	11½	235
DW-2-80-L	71	59	59	24	52½	59%	5%	27½	11½	255

Model Number	Capacity		A Floor to Heater Top	B Jacket Dia.	C Floor to T&P Conn.	D Floor to Water Conn.	E Floor to Exchanger Outlet	F Floor to Exchanger Inlet	G Floor to Thermostat	Approx. Shipping Weight
	Liters		mm.	mm.	mm.	mm.	mm.	mm.	mm.	kg.
DW-2-40-L	140		1045	559	873	1083	137	699	292	89
DW-2-50-L	163		1175	559	1019	1200	137	699	292	93
DW-2-65-L	216		1505	559	1349	1527	137	699	292	107
DW-2-80-L	269		1505	610	1343	1518	137	699	292	116

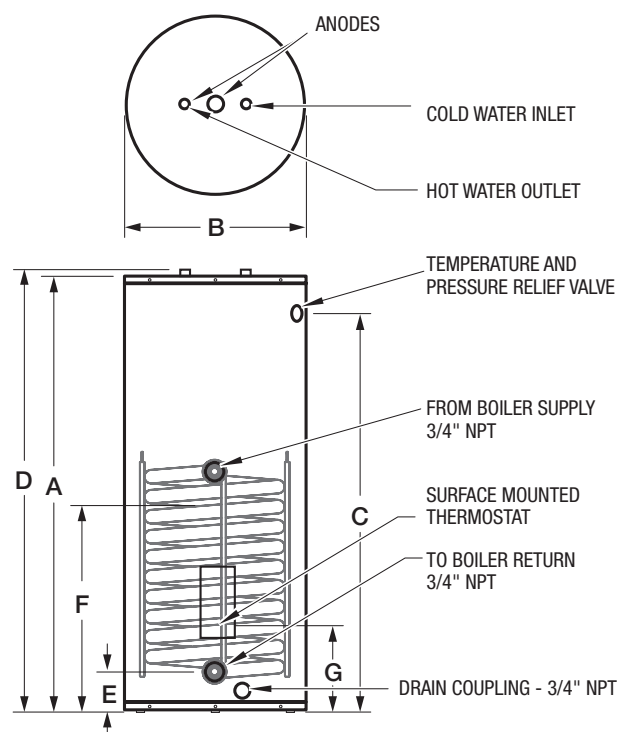

AHRI Certified Water Heater Ratings

Model	First Hour Rating @ 135°F (Gal.)	Continuous Draw Rating @ 135°F (Gal./Hr.)	Standby Heat Loss Rating (°F/Hr.)	Minimum Heat Req. Rate (BTU/Hr.)	Minimum Heat Source Flow Rate (Gal./Min.)
DW-2-40-L	110	85	1.1	58,000	8.0
DW-2-50-L	120	85	0.9	58,000	8.0
DW-2-65-L	135	85	0.7	58,000	8.0
DW-2-80-L	145	85	0.6	58,000	8.0

Model	First Hour Rating @ 57°C (Liters)	Continuous Draw Rating @ 57°C (Liters/Hr.)	Standby Heat Loss Rating (°C/Hr.)	Minimum Heat Req. Rate (kW/Hr.)	Minimum Heat Source Flow Rate (Liters/Min.)
DW-2-40-L	416	322	0.61	17.0	30.3
DW-2-50-L	454	322	0.50	17.0	30.3
DW-2-65-L	511	322	0.39	17.0	30.3
DW-2-80-L	549	322	0.33	17.0	30.3

NOTES: These certified ratings were obtained with a heat source output rate and flow rate as specified and a 180°F (82°C) boiler water supply temperature. Other results will be obtained under different conditions.

Heat Exchanger Head Loss

GPM	2	5	8	10	12
Ft. of Hd. Loss	0.20	0.90	2.40	3.80	5.40

Meets NAECA Requirements

General

All units are certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). All potable water connections are 3/4" NPT (19mm) on 8" (203mm) centers.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

Suitable for Water (Potable) Heating and Space Heating.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable water side. The potable side of this unit may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance. The heat exchanger side of the unit may be used in space heating applications.

— BRADFORD WHITE IS —

**AMERICAN
STRONG**

Sales: 800-523-2931 ■ Fax 215-641-1612

24/7 Technical Support: 800-334-3393 ■ Email techserv@bradfordwhite.com

Products made by Bradford White are manufactured in the United States using the finest raw materials and components from around the world.

Built to be the Best®