

# Upright Electric Residential Water Heater

## Features

- **Vitraglas® Lining with Microban®**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban® antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.
- **Hydrojet® Total Performance System**—Sediment reducing device that also increases first hour rating of hot water while minimizing temperature build-up in tank.

## Additional Details


- **Fully Automatic Controls**—Fast acting surface-mount thermostat with high limit energy cut-off (manual reset) for safety.
- **Direct Heat Transfer with Immersed Elements**—Transfers heat directly and efficiently to the water. Screw-in style.
- **Insulation System**—Non-CFC foam covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Water Connections**— $\frac{3}{4}$ " (19mm) NPT factory-installed true dielectric fittings extend water heater life and simplify water line connections.
- **Factory-Installed Heat Traps**—Design incorporates a flexible disk that reduces heat loss in piping and eliminates the potential for noise generation.
- **Protective Anode Rod**—Provides added protection against corrosion for long-term, trouble-free service.
- **Simultaneous and Non-Simultaneous Operation Available**—Simultaneous operation indicates when both elements (if equipped) are being heated at the same time. Non-Simultaneous operation indicates when one element is being heated at a time\*.
- **Voltages Available**—120V, 208V, 240V, 277V, 480V.
- **Single Phase or Three Phase Operation Available**—120V & 277V may only be wired for single phase operation.
- **T&P Relief Valve**—Installed.
- **These Water Heaters are Approved for Installation in a Manufactured Home**—(mobile home) and must be installed in accordance with CAN/CSA Z240 MH series.



Photo is of RE250T6



Copper Screw Type  
Immersion Element  
(INCOLOY® type immersion  
element available upon request)



\*Simultaneous operation must be specified when ordering.

## 6 or 10-Year Limited Tank Warranties / 6-Year Limited Warranty on Component Parts.

For more information on warranty, please visit [www.bradfordwhite.com](http://www.bradfordwhite.com)

For products installed in USA, Canada, and Puerto Rico. See complete copy of the warranty included with the heater for limitations.

Microban® antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban® is a registered trademark of Microban Products Company.

C1201-0425 CANADA

# Upright Electric

## Residential Water Heater

### SPECIFICATIONS

Model Number	Rated Nominal Capacity		Standby Loss	First Hour Rating	Recovery 90°F Rise*		A Floor to Heater Top	B Jacket Dia.	C Floor to Water Conn.	D C/L of Water Conn.	E Floor to T&P Conn.	G Water Conn. NPT	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.			U.S. GPH	Imp. GPH							
			Watts	Gal.			in.	in.	in.	in.	in.	in.	lbs.
RE230S6	27	22	53	N/A	21	18	47	18	47 3/4	8	47 3/4	3/4	90
RE330S6	27	22	44	47	21	18	46 11/16	20	48 15/16	8	48 15/16	3/4	100
RE240S6	38	32	61	55	21	18	47 3/16	20	49 7/16	8	49 7/16	3/4	123
RE340S6	38	32	51	55	21	18	47 3/16	22	49 7/16	8	49 7/16	3/4	114
RE340T6	37	31	51	56	21	18	60 3/16	20	62 7/16	8	62 7/16	3/4	125
RE250S6	47	39	59	60	21	18	47 3/16	22	49 7/16	8	49 7/16	3/4	143
RE250T6	47	39	63	64	21	18	59	20	60 1/4	8	60 1/4	3/4	130
RE350S6	47	39	56	67	21	18	47 3/16	24	49 7/16	8	49 7/16	3/4	144
RE255T6	55	46	66	75	21	18	56 15/16	23	58 3/16	8	58 3/16	3/4	142
RE265T6	61	51	71	73	21	18	59 1/4	22	60 1/4	8	60 1/4	3/4	156
RE280T6	76	63	84	75	21	18	59 1/4	24	60 1/4	8	60 1/4	3/4	183



Model Number	Rated Nominal Capacity	Standby Loss	First Hour Rating	Recovery 50°C Rise*	A Floor to Heater Top	B Jacket Dia.	C Floor to Water Conn.	D C/L of Water Conn.	E Floor to T&P Conn.	G Water Conn. NPT	Approx. Shipping Weight
	Liters	Watts	Liters	Liters/Hour	mm.	mm.	mm.	mm.	mm.	mm.	kg.
RE230S6	102	53	N/A	79	1194	457	1213	203	1213	19	41
RE330S6	102	44	178	79	1186	508	1243	203	1243	19	45
RE240S6	140	61	208	79	1199	508	1256	203	1256	19	56
RE340S6	140	51	205	79	1199	559	1256	203	1256	19	52
RE340T6	140	51	212	79	1529	508	1586	203	1586	19	57
RE250S6	178	59	227	79	1199	559	1256	203	1256	19	65
RE250T6	178	63	242	79	1499	508	1530	203	1530	19	59
RE350S6	178	56	254	79	1199	610	1256	203	1256	19	65
RE255T6	208	66	284	79	1446	584	1478	203	1478	19	64
RE265T6	231	71	276	79	1505	559	1530	203	1530	19	71
RE280T6	288	84	284	79	1505	610	1530	203	1530	19	83

If bottom cold water inlet kit is required, order part # 265-52904-00. Standby loss (Watts) is based on top inlet location.

\* Based on 4500W/4500W, Non-Simultaneous operation. For 10 year models, change suffix "6" to "10"

Wattage Limitations for Simultaneous Operation	Voltage					Wattage Limitations for Non-Simultaneous Operation	Voltage				
	120V	208V	240V	277V	480V		120V	208V	240V	277V	480V
1500W / 1500W	yes	yes	yes	yes	yes	1500W / 1500W	yes	yes	yes	yes	yes
2000W / 2000W	no	yes	yes	yes	yes	2000W / 2000W	yes	yes	yes	yes	yes
2500W / 2500W	no	yes	yes	yes	yes	2500W / 2500W	yes	yes	yes	yes	yes
3000W / 3000W	no	yes	yes	yes	yes	3000W / 3000W	yes	yes	yes	yes	yes
3500W / 3500W	no	yes	yes	no	no	3500W / 3500W	no	yes	yes	no	no
3800W / 3800W	no	no	yes	no	no	3800W / 3800W	no	no	yes	no	no
4000W / 4000W	no	yes	yes	yes	yes	4000W / 4000W	no	yes	yes	yes	yes
4500W / 4500W	no	yes	yes	yes	yes	4500W / 4500W	no	yes	yes	yes	yes
5000W / 5000W	no	yes	yes	yes	yes	5000W / 5000W	no	yes	yes	yes	yes
5500W / 5500W	no	yes	yes	no	no	5500W / 5500W	no	yes	yes	no	no
6000W / 6000W	no	no	yes	yes	yes	6000W / 6000W	no	yes	yes	yes	yes

Wattage	Recovery ▲ GPH Temperature Rise °F					Wattage	Recovery ▲ LPH Temperature Rise °C				
	60	80	90	100	120		34	45	50	56	67
1500W	10	8	7	6	5	1500W	38	30	26	23	19
2000W	14	10	9	8	7	2000W	53	38	34	30	26
2500W	17	13	11	10	9	2500W	64	49	42	38	34
3000W	21	15	14	12	10	3000W	79	57	53	45	38
3500W	24	18	16	14	12	3500W	91	68	61	53	45
3800W	26	20	18	16	13	3800W	98	91	82	73	59
4000W	28	21	18	16	14	4000W	106	79	68	61	53
4500W	31	23	21	19	15	4500W	117	87	79	72	57
5000W	34	26	23	21	17	5000W	129	98	87	79	64
5500W	38	29	25	23	19	5500W	144	110	95	87	72
6000W	41	31	28	25	21	6000W	155	117	106	95	79

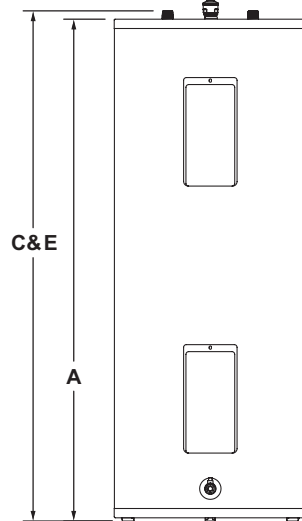

▲ (GPH/LPH based on Non-Simultaneous operation, when Simultaneous operation the GPH/LPH will approximately double.)

### GENERAL:

All models UL® listed. These heaters are wired inter-locking (Non-Simultaneous, Single Phase) 240V with two 4500W elements, unless otherwise specified. All water and electrical connections are 3/4" NPT (19mm). All models certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa.)

**Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.**