

ElectriFLEX™ LD Utility Commercial Electric Water Heater

Features

- **Vitraglas® Lining with Microban®**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban® antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.

Additional Details

- **Fully Automatic Thermostat Controls**—Fast acting surface-mount thermostats with a maximum setpoint of 175°F and a high limit energy cut-off (manual reset) for safety.
- **Direct Heat Transfer With a Single Immersed Element**—Transfers heat directly and efficiently to the water. Screw-in style element.
- **Insulation System**—Non-CFC foam insulation covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Water Connections**— $\frac{3}{4}$ " (19mm) NPT factory-installed true dielectric fittings extend water heater life and simplify water line connections. Located on the side for easier installation (Fittings packaged separately inside carton).
- **Protective Anode Rod**—Provides added protection against corrosion for long trouble-free service.
- **Steel Tank**—Heavy gauge steel automatically formed, rolled, and welded.
- **Voltages Available**—120V, 208V, 240V, 277V, 480V.
- **Single Phase Operation Only.**
- **Field Conversion Kits**—Change voltage, and kW in the field (see options on following page).
- **T&P Relief Valve**—Installed.
- **NSF 5 Kits Available.**



Photo is of LE112T3-1



Copper Screw Type
Immersion Element
(INCOLOY® type immersion
element available upon request)



3 or 5-Year Limited Tank Warranties / 1-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. See complete copy of the warranty included with the heater for limitations.

Microban® antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban® is a registered trademark of Microban Products Company.

C1412-1025 CANADA

ElectriFLEX™ LD Utility Commercial Electric Water Heater

SPECIFICATIONS

Model Number	Rated Nominal Capacity		Recovery at 100°F Rise*		A Floor to Top of Heater	B Jacket Dia.	C Floor to C/L of Hot Water Conn.	D Floor to C/L of Cold Water Conn.	E Floor to T&P Conn.	F Floor to Anode Rod	Water Conn. NPT	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	U.S. GPH	Imp. GPH	in.	in.	in.	in.	in.	in.	in.	lbs.
LE16U3-1†	6	5	6	5	16 1/2	14	10 1/8	3 1/8	10 1/8	N/A	3/4	33
LE110U3-1	10	8	6	5	17 1/2	16	15	5 11/16	14	9 11/16	3/4	48
LE112T3-1†	12	10	6	5	27 3/4	14	21 1/8	3	21 1/8	N/A	3/4	48
LE220U3	18	15	7	6	26 1/4	20	18 1/2	3 1/4	18 1/2	18 1/2	3/4	67 1/2


Model Number	Rated Nominal Capacity		Recovery 56°C Rise*		A Floor to Top of Heater	B Jacket Dia.	C Floor to C/L of Hot Water Conn.	D Floor to C/L of Cold Water	E Floor to T&P Conn.	F Floor to Anode Rod	Water Conn. NPT	Approx. Shipping Weight
	Liters	Liters	Liters/ Hour	Liters/ Hour	mm.	mm.	mm.	mm.	mm.	mm.	mm.	kg.
LE16U3-1†	23	23	419	356	419	356	257	79	257	N/A	19	15
LE110U3-1	38	38	445	406	445	406	381	144	355	246	19	22
LE112T3-1†	45	45	705	356	705	356	537	76	537	N/A	19	22
LE220U3	68	68	667	508	667	508	470	83	470	470	19	76

Specify wattage and voltage when ordering. Use chart to right for maximum wattages at certain voltages.

† Maximum wattage at any voltage is 3000W. For 5 year models, change suffix "3" to "5".

Single element only.

* Based on 1500W operation. NSF Kits available when ordering.

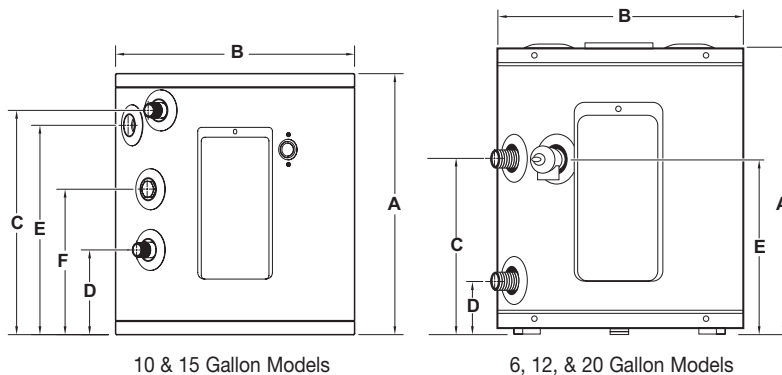

Wattage Limitations	Voltage				
	120V	208V	240V	277V	480V
1500W	yes	yes	yes	yes	yes
2000W	yes	yes	yes	yes	yes
2500W	yes	yes	yes	yes	yes
3000W	yes	yes	yes	yes	yes
3500W	no	yes	yes	no	no
4000W	no	yes	yes	yes	yes
4500W	no	yes	yes	yes	yes
5000W	no	yes	yes	yes	yes
5500W	no	yes	yes	no	no
6000W	no	yes	yes	yes	yes

Wattage	Recovery GPH Temperature Rise °F					
	60	80	90	100	120	
1500W	10	8	7	6	5	
2000W	14	10	9	8	7	
2500W	17	13	11	10	9	
3000W	21	15	14	12	10	
3500W	24	18	16	14	12	
4000W	28	21	18	16	14	
4500W	31	23	21	19	15	
5000W	34	26	23	21	17	
5500W	38	29	25	23	19	
6000W	41	31	28	25	21	

Wattage	Recovery LPH Temperature Rise °C					
	34	45	50	56	67	
1500W	38	30	26	23	19	
2000W	53	38	34	30	26	
2500W	64	49	42	38	34	
3000W	79	57	53	45	38	
3500W	91	68	61	53	45	
4000W	106	79	68	61	53	
4500W	117	87	79	72	57	
5000W	129	98	87	79	64	
5500W	144	110	95	87	72	
6000W	155	117	106	95	79	

Note: Above chart can be used to determine maximum wattage at certain voltages. **INCOLOY® element only. * 415-46409-02, -03, -04, -46, -47, & -48 contain only one element. These kits cannot be wired as simultaneous. These are non-simultaneous kits only. Except where noted above, each kit will include two replacement elements, two gaskets, a rating plate overlay and one set of instructions. For water heaters with only one element, please retain the extra element and gasket as a service part.

GENERAL:

All models UL® listed. These heaters are wired Single Phase, 120V with one 1500W element, unless otherwise specified. All water and electrical connections are 3/4" (19mm) NPT. All models certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). Applicable models CSA verified for energy performance in accordance with C191.1-M90.

SAMPLE SPECIFICATION:

Water heater shall be a Bradford White model with a rated storage capacity of not less than _____ gallons/liters, a minimum kW input of _____, and a minimum recovery of _____ GPH/LPH at 100°F (56°C) temperature rise. The tank shall be lined with Vitraglas® vitreous enamel with Microban® antimicrobial technology. The tank should consist of one screw type elements with a combined maximum input of ≤ 6 kW. The tank shall have one anode rod. The units should be design certified by UL® for field conversions with specific kits available from the factory. The heater shall be insulated with not less than 1" (25 mm) of Non-CFC foam. This water heater shall be equipped with an ASME rated T&P relief valve. The entire installation shall be made in compliance with state and local codes and ordinances.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



Customer Service / Sales: 1-866-690-0961 / 905-203-0600
24/7 Technical Support: 800-334-3393 • Email: TechServ@bradfordwhite.com

©2025, Bradford White Corporation, USA. All rights reserved.

C1412-1025 CANADA