

KwickShot®

Tankless Electric Water Heater

Single Point Flow Controlled, Non-Thermostatic Models (Single Phase Only)

Features

- **Self-diagnostics With Intelligent Controls**—Actively protects heater in installed environment.
- **LED Indicator**—Communicates system status and heater operation feedback.

Additional Details

- **On Demand, Continuous Hot Water**—No delay or storage limit.
- **Low Flow Activation**—Starting at .25 GPM (1 LPM) turn on (model dependent).
- **Dry-fire Protection**—Helps prevent heating element dry-fire occurrence.
- **Flexible Installation**—Install in any plumbing orientation.
- **Compact Size**—Fits almost anywhere; suitable for ADA compliant facilities.
- **Easy Installation**—Only one cold water line needed for installation.
- **No T&P Relief Valve Needed**—Ready to go, right out-of-the-box (check local codes).
- **Integral 3/8" (10mm) Compression Fittings**—No sweat connections or soldering required.
- **Control System**—Activates heater only on demand.
- **Bare Wire Technology**—Responsive non-thermostatic tankless technology.
- **Automatic Reset High Temperature Limit**—Enables safe operation.
 - Automatic reset (USA only).
 - Manual reset (Canada only).
- **Warranty**—5-year limited warranty on leaks, 1-year on parts.

Applications

Point-of-use & fixed-flow fixture

Kitchen, wet bar, utility sink, and handwashing

One (1) lavatory faucet, sensor faucet or metering faucet



5-Year Limited Warranty on Leaks / 1-Year Warranty on Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. See complete copy of the warranty included with the heater for limitations.



SPECIFICATIONS

Model Number	kW Rating	Voltage (Volts)	AMPS	TURN ON (GPM)	TURN ON (LPM)	Temperature Rise °F						Temperature Rise °C						Recommended Wire Size (75° C/CU)
						0.35 GPM	0.5 GPM	0.75 GPM	1.0 GPM	1.5 GPM	2.0 GPM	1.3 LPM	1.9 LPM	2.8 LPM	3.8 LPM	5.7 LPM	7.6 LPM	
TEF024V120CA	2.4	120	20	0.25	0.95	55	33	22	16	11	8	31	18	12	9	6	4	14 AWG
TEF030V120CA	3.0	120	25	0.25	0.95	68	41	27	20	14	10	38	23	15	11	8	6	12 AWG
TEF030V208CA	3.0	208	15	0.25	0.95	68	41	27	20	14	10	38	23	15	11	8	6	14 AWG
TEF030V277CA	3.0	277	11	0.25	0.95	68	41	27	20	14	10	38	23	15	11	8	6	14 AWG
TEF035V120CA	3.5	120	29	0.30	1.14	80	48	32	24	16	12	44	27	18	13	9	7	10 AWG
TEF035V240CA	3.5	240	15	0.30	1.14	80	48	32	24	16	12	44	27	18	13	9	7	14 AWG
TEF035V240CA*	2.6	208	13	0.30	1.14	59	36	24	18	12	9	33	20	13	10	7	5	14 AWG
TEF041V208CA	4.1	208	20	0.40	1.52	—	56	37	28	19	14	—	31	21	16	11	8	14 AWG
TEF041V277CA	4.1	277	15	0.40	1.52	—	56	37	28	19	14	—	31	21	16	11	8	14 AWG
TEF048V240CA	4.8	240	20	0.40	1.52	—	66	44	33	22	16	—	37	24	18	12	9	14 AWG
TEF048V240CA*	3.6	208	17	0.40	1.52	—	49	33	25	16	12	—	27	18	14	9	7	14 AWG
TEF055V240CA	5.5	240	23	0.50	1.90	—	75	50	38	25	19	—	42	28	21	14	11	12 AWG
TEF055V240CA*	4.1	208	20	0.50	1.90	—	56	37	28	19	14	—	31	21	16	11	8	12 AWG
TEF060V277CA	6.0	277	22	0.70	2.65	—	—	55	41	27	20	—	—	31	23	15	11	12 AWG
TEF065V240CA	6.5	240	27	0.70	2.65	—	—	59	44	30	22	—	—	33	24	17	12	10 AWG
TEF065V240CA*	4.8	208	23	0.70	2.65	—	—	44	33	22	16	—	—	24	18	12	9	10 AWG
TEF075V240CA	7.5	240	32	0.70	2.65	—	—	68	51	34	26	—	—	38	28	19	14	10 AWG
TEF075V240CA*	5.6	208	27	0.70	2.65	—	—	51	38	25	19	—	—	28	21	14	11	10 AWG
TEF080V277CA	8.0	277	29	0.70	2.65	—	—	73	55	36	27	—	—	41	31	20	15	10 AWG
TEF083V208CA	8.3	208	40	0.70	2.65	—	—	76	57	38	28	—	—	42	32	21	16	8 AWG
TEF090V277CA	9.0	277	33	0.70	2.65	—	—	82	61	41	31	—	—	46	34	23	17	10 AWG
TEF095V240CA	9.5	240	40	0.80	3.03	—	—	—	65	43	32	—	—	—	36	24	18	8 AWG
TEF095V240CA*	7.1	208	34	0.80	3.03	—	—	—	38	25	19	—	—	—	21	14	11	8 AWG
TEF100V277CA	10.0	277	36	0.80	3.03	—	—	—	68	46	34	—	—	—	38	26	19	8 AWG


* 240V units can be used on 208V single phase with 25% reduced temperature output. Please note per UL standards the rating plate and installation instructions will all be according to a 240V applied voltage. Check with local officials prior to derating the electrical infrastructure.

System Specifications

Dimensions:	10.5" H x 5.25" W x 3" D	266mm H x 133.4mm W x 76mm D
Product Weight:	(model dependent) 2.75 lb/3 lb	(model dependent) 1.25kg/1.36kg
Cover:	ABS-UL 94 5VA	
Color:	White	
Minimum Operating Pressure:	30 PSI	207 kPa
Maximum Operating Pressure:	150 PSI	1034 kPa
Element:	Replaceable nichrome cartridge insert	
Fittings:	3/8" compression fittings	10mm compression fittings

U.S. Patent Pending Technology.

Note: For optimum performance, mounting location should be located within 2 feet (.61m) of fixture.

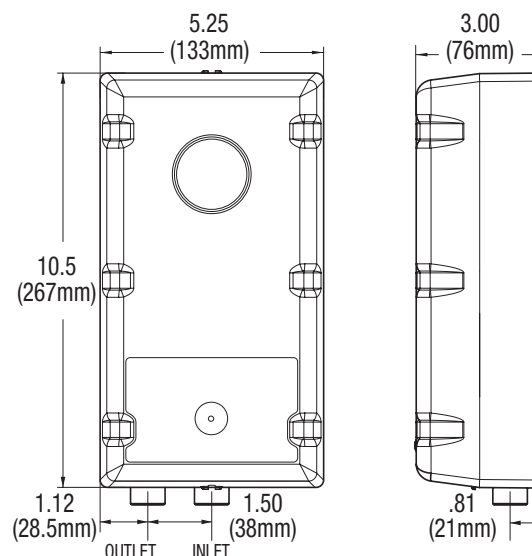

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.