

Vertical Round (VR) Commercial Electric Water Heater

Features

- **Vitraglas® Lining with Microban®**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban® antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.

Additional Details

- **Stainless Steel Options Available.**
- **ASME Tank Construction**—Standard.
- **Magnetic Contactors with Immersion Thermostats**—120 volt control circuit with built in transformer. Elements are thermostatically controlled in 54kW (max) increments.
- **Low Watt Density INCOLOY® Elements**—The increased surface area and lower watts per square inch ratio of INCOLOY® elements (compared to copper elements) allows for increased resistance to dry fire burnout and lime buildup associated with hard water conditions.
- **Insulation System**—Non-CFC foam insulation covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Protective Anode Rods**—Provide added protection against corrosion for long-term, trouble-free service.
- **3" (76mm) Handhole Cleanout**—Allows inspection of tank interior and facilitates the removal of sediment deposits.
- **Terminal Block Connections**—Easy and safe wiring connections are made possible by factory installed terminal blocks.
- **Internal Fusing**—All elements and circuits are fused in 48 amp increments, providing complete electrical protection. Cartridge type fuses are rated at 200,000 ampere interrupting capacity.
- **Voltages Available**—208, 240, 277, 380, 400, 415, 480 and 600.
- **180°F Temperature Operation**—Every Commercial Electric Vertical Round Heater is approved for 180°F (82°C) operation for sanitizing and other high-temperature requirements.
- **Temperature and Pressure Relief Valve**—Factory provided ASME rated relief valve protects against excessive temperature and/or pressure buildup within the tank.
- **Working Pressure**—150 PSI ASME construction.
- **Steel Jacket**—The steel jacket is beautifully finished in durable acrylic enamel. This combines attractive appearance with maximum protection.
- **Digital Temperature Display**—Easy to read digital temperature display located on front cabinet.
- **Hinged Door with Key Lock**—Keyed door lock provides additional safety and security.
- **Channel Iron Skid Base**—all models.
- **Lifting Lug Access.**
- **UL-1453 Certified.**



150 to 2500 (568 to 9464L)
Gallons Storage
15 to 360 kW Models



Warranty varies based upon lining and tank construction.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. See complete copy of the warranty included with the heater for limitations.

Microban® antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban® is a registered trademark of Microban Products Company.

Vertical Round (VR)

Commercial Electric Water Heater

Optional Equipment Features:

- **BMS Contacts** = 120 V on/off only.
- **Low Water Cut Off**—Prevents energizing of the heater when not filled with water or upon low water condition.
- **Electronic Step Controller (36 kW & higher)**—Electronic sequencing thermostats available in four-step increments.
- **Shunt Trip Disconnect**—Provides maximum protection by interrupting all power to the system in the event of a control sensed malfunction or overcurrent. Specifications may vary as they are dependent on the electrical configuration of the water heater. Contact Factory for Actual Specification.†
- **Low / High Pressure Switch**—Turns off control circuit when water pressure drops below a set minimum, or above a set maximum.
- **Temperature and Pressure Gauge**—Jacket mounted for convenient viewing.
- **Manway**—Allows removal of sediment and inspection of interior surface. Available on tanks 250 gallons and larger.
- **Pilot Lights and Manual Limiting Switches**—With indicating lights – permits manual limitation of heating input by switching off current to each contactor.
- **Alarm Bell**—Warns of various control failures.
- **Safety Door Interlock**—Prevents opening of access door while heater is energized.
- **Time Clock**—Digital display. Used to control on/off cycles of the water heater as programmed by the owner or responsible party. Available in 7 day or 24 hour types.†
- **Stainless Steel**—316L Passivated (10 Year Limited Warranty), and 2205 passivated duplex (25 Year Limited Warranty).*
- **Double Vitraglas® Lining with Microban®**—Extends tank warranty to six years.
- **Tube Bundle(s).**
- **Solar Coil(s).**

† Separate mounting.

* For Other Stainless Steel Options Consult factory

Standard kW Input and Amperage

kW	GPH Recovery 100°F Rise	LPH Recovery 56°C Rise	BTU/Hr. Equivalent	Typical Number of Thermostats	Typical Number of Elements	Typical Element kW	Typical Number of Contactors (208,240) / (380,400 415,480)	Suggested Control Steps (208,240) / (380,400, 415,480)	Amperage Draw								
									Single Phase		Three Phase						
									208V	240V	208V	240V	380V	400V	415V	480V	600V
15	62	235	51,180	1	1	15	1/1	—	72	63	42	36	23	22	21	18	14
18	74	280	61,416	1	1	18	2/1	—	87	75	50	43	27	26	25	22	17
30	123	466	102,360	1	2	15	2/1	—	144	125	83	72	46	43	42	36	29
36	148	560	122,832	1	2	18	4/2	4/2	174	150	100	87	55	52	50	43	35
45	185	700	153,540	1	3	15	3/2	3/2	216	188	125	108	68	65	63	54	43
54	221	837	184,248	1	3	18	6/2	3/2	260	225	150	130	83	78	75	65	52
60	246	931	204,720	2	4	15	4/2	4/3	289	250	167	144	91	87	83	72	58
72	295	1117	245,664	2	4	18	8/4	4/4	—	—	200	173	109	104	100	87	69
90	369	1397	307,080	3	6	15	6/3*	3/3	—	—	250	217	137	130	125	108	87
108	443	1677	368,496	2	6	18	12/4**	4/4	—	—	300	260	164	156	150	130	104
120	492	1862	409,440	3	8	15	8/4***	4/4	—	—	333	289	182	173	167	144	115
135	554	2097	460,620	3	9	15	9/6	4/4	—	—	375	325	205	195	188	162	130
144	590	2233	491,328	4	8	18	16/8	4/4	—	—	400	346	219	208	200	173	139
162	664	2514	552,744	3	9	18	18/6****	8/6	—	—	450	390	246	234	225	195	156
180	738	2794	614,160	4	10	18	20/10	8/8	—	—	500	433	273	260	250	217	173
216	886	3354	736,992	4	12	18	24/8	8/8	—	—	600	520	328	312	301	260	208
234	959	3630	798,408	5	13	18	26/13	9/7	—	—	650	563	356	338	326	281	225
252	1033	3910	859,824	5	14	18	28/14	9/7	—	—	700	606	383	364	351	303	242
270	1107	4190	921,240	5	15	18	30/10	12/10	—	—	749	650	410	390	376	325	260
288	1181	4471	982,656	6	16	18	32/16	12/12	—	—	799	693	438	416	401	346	277
306	1255	4751	1,044,072	6	17	18	34/17	9/9	—	—	849	736	465	442	426	368	294
324	1328	5027	1,105,488	6	18	18	36/12	9/6	—	—	899	779	492	468	451	390	312
342	1402	5307	1,166,904	7	19	18	38/19	10/10	—	—	949	823	520	494	476	411	329
360	1476	5587	1,228,320	7	20	18	40/20	10/10	—	—	999	866	547	520	501	433	346

For kW inputs not shown above consult factory.

**380V has 4


***380V has 8

***380V has 6

****380V has 9

Vertical Round (VR)

Commercial Electric Water Heater

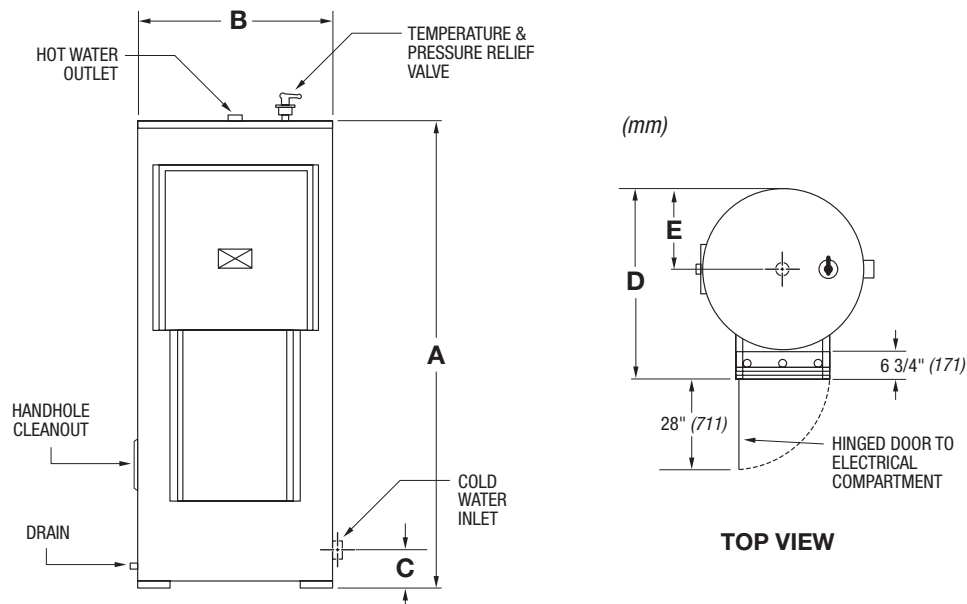

Vertical Round (VR) Series

These water heaters meet or exceed all or portions of (where applicable) the minimum efficiency requirements of ASHRAE Standard 90.1 (latest edition).

Model Number	Rated Nominal Capacity	Maximum kW	A Floor to Top of Heater	B Jacket Dia.	C Floor to Cold Water Inlet	D Depth	E Back of Heater to Hot Water Outlet	Water Conn.	Approx. Shipping Weight
	Gallons		in.	in.	in.	in.	in.	in.	lbs.
VR-150-(kW)	150	90	65½	32	7¾	38¾	16	1½	650
VR-200-(kW)	200	162	78	32	7¾	38¾	17	1½	750
VR-250-(kW)	250	162	92	34	19½	40¾	17	1½	1165
VR-300-(kW)	300	162	80	40	21	46¾	20	2	1350
VR-400-(kW)	400	162	80	46	22½	52¾	23	2	1590
VR-500-(kW)	500	162	92	46	22½	52¾	23	2	1700
VR-600-(kW)	600	216	92	52	24½	58¾	26	2½	2010
VR-800-(kW)	800	270	104	52	24½	58¾	26	2½	2450
VR-1000-(kW)	1000	360	128	52	24½	58¾	26	2½	3160
VR-1250-(kW)	1250	360	133	58	26	64¾	29	3	3792
VR-1500-(kW)	1500	360	129	64	27½	70¾	32	3	4550
VR-2000-(kW)	2000	360	141	70	29½	76¾	35	3	5460
VR-2500-(kW)	2500	360	147	76	30½	82¾	38	3	6553

Model Number	Rated Nominal Capacity	Maximum kW	A Floor to Top of Heater	B Jacket Dia.	C Floor to Cold Water Inlet	D Depth	E Back of Heater to Hot Water Outlet	Water Conn.	Approx. Shipping Weight
	Liters		mm.	mm.	mm.	mm.	mm.	mm.	kg.
VR-150-(kW)	568	90	1664	813	197	984	406	38	295
VR-200-(kW)	757	162	1981	813	197	984	432	38	340
VR-250-(kW)	946	162	2337	864	495	1035	432	38	528
VR-300-(kW)	1136	162	2032	1016	533	1187	508	51	612
VR-400-(kW)	1514	162	2032	1168	572	1340	584	51	721
VR-500-(kW)	1893	162	2337	1168	572	1340	584	51	771
VR-600-(kW)	2271	216	2337	1321	622	1492	660	64	912
VR-800-(kW)	3028	270	2642	1321	622	1492	660	64	1111
VR-1000-(kW)	3785	360	3251	1321	622	1492	660	64	1433
VR-1250-(kW)	4732	360	3378	1473	660	1645	737	76	1720
VR-1500-(kW)	5678	360	3277	1626	697	1797	813	76	2064
VR-2000-(kW)	7571	360	3581	1778	749	1949	889	76	2477
VR-2500-(kW)	9464	360	3734	1930	775	2102	965	76	2972

Note: Models above 90kW at 208V, 240V or 380V, and 162kW at 400V, 415V or 480V, exceed the capacity of a single control panel and may require multiple control panels. Consult the factory for specific details and optional construction.

Vertical Round (VR)

Commercial Electric Water Heater

Sample Specification

Water Heater(s) shall be Bradford White Commercial Electric Vertical Round (VR) Series model number _____ with _____ gallons storage capacity, rated at _____ kilowatts, _____ volts, _____ phase and _____ Hz. Heater to be completely insulated and jacketed for vertical installation. The jacket shall be round steel with acrylic enamel finish. Jacket shall have a hinged access door with keyed lock. Tank insulation shall be non-CFC and sufficient to meet ASHRAE 90.1b.

Tank construction shall be 150 PSI maximum allowable working pressure as per ASME standard and be ASME stamped and National Board listed. All tanks are to be lined with Vitraglas® with Microban®, fired at 1600°F (871°C) by a process which provides a molecular interchange of glass and steel.

The Commercial Electric Vertical Round (VR) Series heater shall include the following standard features: magnetic contactors with immersion thermostats, internal fusing for control and load circuits, low-watt density INCOLOY® sheath elements, ASME rated temperature and pressure relief valve, terminal block wiring, 180°F (82°C) water temperature rating, 3-year limited warranty.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



Customer Service / Sales: 1-866-690-0961 / 905-203-0600

24/7 Technical Support: 800-334-3393 • Email: TechServ@bradfordwhite.com

©2025, Bradford White Corporation, USA. All rights reserved.

C442-1125 CANADA