

Combi1®

Residential Power Vent TTW®

Gas Water Heater System

Features

- **Defender Safety System®***—Designed to be the safest & most reliable flammable vapor ignition resistant system in the industry with a proven track record since 2003. Featuring an advanced ScreenLok® technology flame arrestor design, resettable thermal switch, sight window, and designed to be maintenance-free.
- **Bradford White ICON System®**—Intelligent gas control with no need for external electricity. Proprietary algorithms provide tighter temperature differential and consistent water temperature levels up to 180°F (82°C). LED light indicates operation status/service required.
- **Vitraglas® Lining with Microban®**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban® antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.
- **Hydrojet® Total Performance System**—Sediment reducing device that also increases first hour delivery of hot water while minimizing temperature build-up in tank.

Additional Details

- **AquaVENT MAX™ from Fasco™**: The industry's quietest blower motor with a lower profile and robust electrical connection. Includes 10-foot (3m) power cord (120 VAC).
- **Internal Single Wall Heat Exchanger**—1½" (38mm) O.D. glass coated (Vitraglas® with Microban®) steel coil.
 - **1" (25mm) NPT Front Supply and Return Connections.**
 - **Low Heat Exchanger Head Loss**—Up to 10 GPM (38L) flow, with less than 5ft. (1.5m) of head loss. Greatly reduces the required pump size for heat exchange.
- **Horizontal and Vertical Venting**—With 3" (76mm) or 4" (102mm) PVC, ABS or CPVC
- **High Altitude Ready**—Certified for installations up to 10,100 feet (3078m) out of the box. No conversion kit required.
- **Insulation System**—Non-CFC foam covers the tank, reducing heat loss, energy consumption, and improves efficiency and jacket rigidity.
- **Pedestal Base**—Rugged and durable base allows easy transport and positioning while providing corrosion-resistant contact with floor.
- **Water Connections**—¾" (19mm) NPT factory installed true dielectric fittings.
- **Two Protective Anode Rods**—Provides added protection against corrosion for long-term, trouble-free service.
- **T&P Relief Valve**—Installed.
- **Low Restrictive Brass Drain Valve**—Durable tamper proof design.
- **Thermostatic Mixing Valve (ASSE Approved)**—Included.

*C-SW2-TW50T10FBN only



C-SW2-TW50T10FBN

Bradford White
DEFENDER
Safety System

BRADFORD WHITE
ICON
System

VITRAGLAS
SUPERIOR PROTECTION SINCE 1941
+
MICROBAN

Hydrojet



10-Year Limited Tank Warranties / 6-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. See complete copy of the warranty included with the heater for limitations.

Microban® antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban® is a registered trademark of Microban Products Company.

C542-0825 CANADA

Combi1®

Residential Power Vent TTW® Gas Water Heater System

SPECIFICATIONS

These water heaters meet or exceed all or portions of (where applicable) the minimum efficiency requirements of ASHRAE Standard 90.1 (latest edition). 80% Recovery Efficiency.


Model Number	Rated Nominal Volume		Nat. BTU/Hr. Input	LP BTU/Hr. Input	Recovery 90°F Rise*				A Floor to Top of Blower	B Jacket Dia.	C Vent Size	D Floor to T&P Conn.	E Floor to Gas Conn.	F Floor to Exchanger Inlet	G Floor to Exchanger Outlet	H Floor to Heater Top in.	J Floor to Water Conn. in.	K Depth in.	Approx. Shipping Weight lbs.
	U.S. Gal.	Imp. Gal.			Nat. U.S. GPH	Imp. GPH	LP U.S. GPH	Imp. GPH	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	
C-SW2-TW50T10FBN	45	38	67,000	60,000	72	60	65	54	63 ¹³ / ₁₆	22	3 or 4	50%	11%	31½	50	56%	60%	26%	243
C-SW2-TW75T10BN	72	61	76,000	75,500	82	69	81	67	66 ¹ / ₂	26	3 or 4	53	15	34½	53	60%	64%	31	313

Model Number	Rated Nominal Volume		Nat. kW Input	LP kW Input	Recovery 50°C Rise*		A Floor to Top of Blower	B Jacket Dia.	C Vent Size	D Floor to T&P Conn.	E Floor to Gas Conn.	F Floor to Exchanger Inlet	G Floor to Exchanger Outlet	H Floor to Heater Top mm.	J Floor to Water Conn. mm.	K Depth mm.	Approx. Shipping Weight kg.
	Liters				Nat. Liters/Hour	LP Liters/Hour	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	
C-SW2-TW50T10FBN	170		19.6	17.5	272	246	1621	559	76 or 102	1273	298	786	1270	1432	1543	679	110
C-SW2-TW75T10BN	272		22.3	22.1	310	306	1684	660	76 or 102	1346	389	868	1549	1530	1632	787	142

Propane models feature a Titanium Stainless Steel propane burner. For Propane (LP) models change suffix "BN" to "SX".

* Based on manufacturers rated recovery efficiency.

120 VAC Required for Power Venting / 120 VAC, 60Hz., 3.1 Amperes.

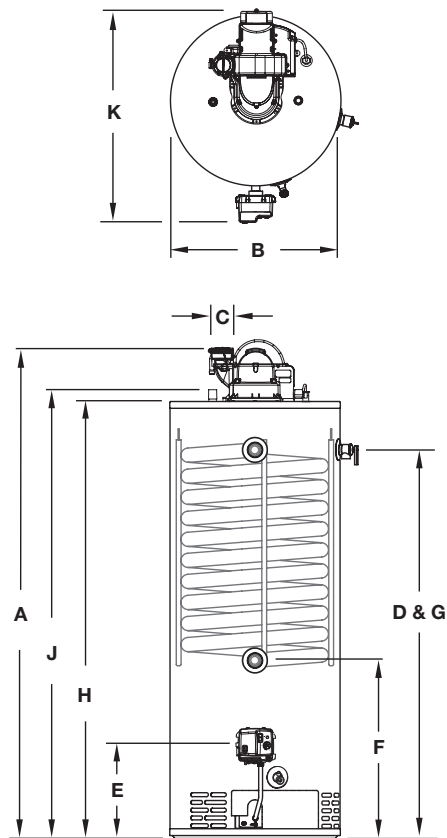

Heat Exchanger Head Loss		Heat Exchanger Head Loss	
GPM	Ft. of Hd. Loss	LPM	m of Hd. Loss
2	0.03	7.6	0.0091
5	0.20	18.9	0.0609
8	0.51	30.2	0.1554
10	0.80	37.9	0.2438
12	1.15	45.4	0.3505

C-SW2-TW50T10FBN C-SW2-TW75T10BN	3" (76mm) Vent Pipe	4" (102mm) Vent Pipe
Max. Equivalent Length	†75 ft. †23.0m	†180 ft. †55.0m
Min. Equivalent Length	7 ft. 2.1m	15 ft. 4.6m
Number	1 70 ft. 21.3m	175 ft. 53.3m
of	2 65 ft. 20.0m	170 ft. 52.0m
90° Elbows	3 60 ft. 18.3	165 ft. 50.3m

Subtract 5 ft. (1.5m) for each additional 90° elbow.
† For high altitude installations, consult the installation instructions.

Heat Exchanger Values*

Supply Temperature	140°F	60°C	120°F	49°C	100°F	38°C
Return Temperature	120°F	49°C	100°F	38°C	80°F	27°C
Differential	20°F	11°C	20°F	11°C	20°F	11°C
Flow Rate (50 Gal.)	4.1 GPM	15.5 LPM	4.6 GPM	17.4 LPM	4.6 GPM	17.4 LPM
Net Output (50 Gal.)	35,000 BTU/Hr.	10.3kW	39,500 BTU/Hr.	11.6kW	39,500 BTU/Hr.	11.6kW
Flow Rate (75 Gal.)	4.1 GPM	15.5 LPM	5.6 GPM	21.2 LPM	5.6 GPM	21.2 LPM
Net Output (75 Gal.)	35,000 BTU/Hr.	10.3kW	47,500 BTU/Hr.	14.0kW	47,500 BTU/Hr.	14.0kW

* These values were obtained using 180°F stored tank temperature.

Net Output is the space heating capacity based on normal piping and pickup allowance of 15%.

Actual values may vary based on circulator flow rate, number of zones, water and space heating demands. Numbers subject to change.

GENERAL:

Meets NAECA Requirements.

All gas water heaters are certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). All potable water connections are 3/4" NPT (19mm) on 11" (279mm) centers. All heat exchanger connections are 1" NPT (25mm). All gas connections 1/2" (13mm). All models design certified by CSA International, ANSI Z21.10.3 (C-SW2-TW50T10FBN = Z21.10.1) and peak performance rated.

Suitable for Water (Potable) Heating and Space Heating.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable side of this system. The potable side may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance. The heat exchanger side of the unit may be used in space heating applications.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



Customer Service / Sales: 1-866-690-0961

24/7 Technical Support: 800-334-3393 • Email TechServ@bradfordwhite.com

Products made by Bradford White are manufactured in America using the finest materials and components from around the world. ©2025, Bradford White Corporation, USA. All rights reserved.

C542-0825 CANADA