

Combi[®]

Residential Atmospheric Vent Combi[®] Gas Water Heater System



Photo is of
C-SW2-75T10BN

The Combi[®] Models Feature:

- **Bradford White ICON System[®]**— Intelligent gas control with proven millivolt powered technology and built-in piezo igniter. A standard, off the shelf thermopile converts heat energy from the pilot flame into electrical energy to operate the gas valve and microprocessor. No need for external electricity.
 - **Enhanced Performance**—Proprietary algorithms provide enhanced First Hour Rating and tighter temperature differential.
 - **Advanced Temperature Control System**—Microprocessor constantly monitors and controls burner operation to maintain consistent and accurate water temperature levels.
 - **Intelligent Diagnostics**—An exclusive green LED light prompts the installer during start-up and provides ten different diagnostic codes to assist in troubleshooting.
 - **Pilot On Indication**—Flashing green LED provides positive indication that pilot is on.
 - **Separate Immersed Thermowell**—Durable copper thermowell and brass shank provides isolation between electric temperature sensor and surrounding water.
- **Internal Single Wall Heat Exchanger**—Single wall 1½" (38mm) O.D. glass coated (Vitrage[®]) carbon steel coil.
 - **1" (25mm) NPT Front Supply and Return Connections.**
 - **Low Heat Exchanger Head Loss**—Up to 10 GPM (38LPM) (flow, with less than 5 ft. (1.5m) of head loss). Greatly reduces the required pump size for heat exchange.
- **Factory Installed Hydrojet[®] Total Performance System**—Cold water inlet sediment reducing device helps prevent sediment build up in tank. Increases first hour delivery of hot water while minimizing temperature build up in tank.
- **Vitrage[®] Lining with Microban[®]**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban[®] antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.
- **Insulation System**—2" (51mm) Non-CFC foam insulation covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Pedestal Base.**
- **Water Connections**—¾" (19mm) NPT factory installed true dielectric fittings.
- **Two Protective Anode Rods.**
- **T&P Relief Valve**—Installed.
- **Low Restrictive Brass Drain Valve**—Durable tamper proof design.
- **Thermostatic Mixing Valve (ASSE Approved)**—Included.

FEATURING:



10-Year Limited Tank and Heat Exchanger Warranties / 6-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

Microban[®] antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban[®] is a registered trademark of Microban Products Company.



Residential Atmospheric Vent Gas Water Heater System

Combi¹® Models

NATURAL GAS AND LIQUID PROPANE GAS



Meet or exceed ASHRAE 90.1b (current standard) C.E.C. Listed
80% Recovery Efficiency

Model Number	Capacity		Nat. BTU/Hr. Input	LP BTU/Hr. Input	Recovery 90°F Rise*				A Floor to Flue Conn. in.	B Jacket Dia. in.	C Vent Size in.	D Floor to T&P Conn. in.	E Floor to Gas Conn. in.	F Floor to Exchanger Inlet in.	G Floor to Exchanger Outlet in.	H Floor to Top of Heater in.	J Floor to Water Conn. in.	K Depth in.	Approx. Shipping Weight lbs.
	U.S. Gal.	Imp. Gal.			U.S. GPH	Imp. GPH	U.S. GPH	Imp. GPH											
C-SW2-75T10BN	72	61	76,000	76,000	81	70	81	70	62½	26	4	51½	13%	29%	51%	59	63	30%	292

Model Number	Capacity		Nat. kW Input	LP kW Input	Recovery 50°C Rise*		A Floor to Flue Conn. mm.	B Jacket Dia. mm.	C Vent Size mm.	D Floor to T&P Conn. mm.	E Floor to Gas Conn. mm.	F Floor to Exchanger Inlet mm.	G Floor to Exchanger Outlet mm.	H Floor to Top of Heater mm.	J Floor to Water Conn. mm.	K Depth mm.	Approx. Shipping Weight kg.
	Liters				Liters/ Hour	LP Liters/ Hour											
C-SW2-75T10BN	272		22.3	22.3	317	317	1581	660	102	1314	352	752	1314	1499	1600	772	128

Propane model features a Titanium Stainless Steel propane burner. For propane (LP) models change suffix "BN" to "SX".

*Based on manufacturers rated recovery efficiency.

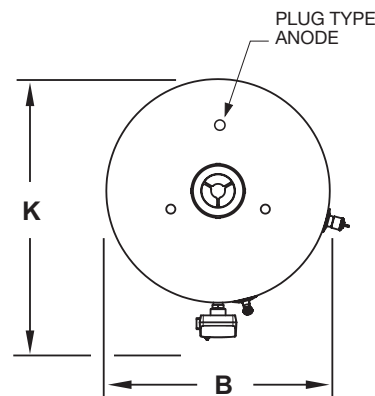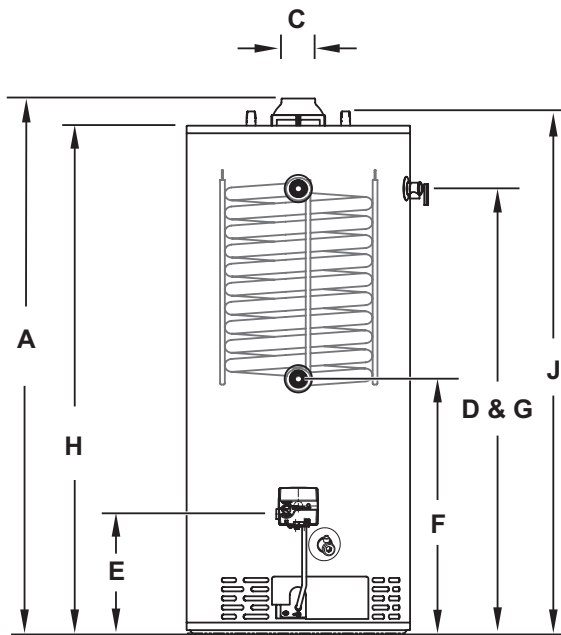

Heat Exchanger Head Loss		Heat Exchanger Head Loss	
GPM	Ft. of Hd. Loss	LPM	m of Hd. Loss
2	0.03	7.6	0.0091
5	0.20	18.9	0.0609
8	0.51	30.2	0.1554
10	0.80	37.9	0.2438
12	1.15	45.4	0.3505

Heat Exchanger Values*

Supply Temperature	140°F	60°C	120°F	49°C	100°F	38°C
Return Temperature	120°F	49°C	100°F	38°C	80°F	27°C
Differential	20°F	11°C	20°F	11°C	20°F	11°C
Flow Rate	4.1 GPM	15.5 LPM	5.6 GPM	21.2 LPM	5.6 GPM	21.2 LPM
Net Output	35,500 BTU/Hr.	10.4 kW	47,500 BTU/Hr.	14.0 kW	47,500 BTU/Hr.	14.0 kW

*These values were obtained using 180°F stored tank temperature.

Net Output is the space heating capacity based on normal piping and pickup allowance of 15%.

Actual values may vary based on circulator flow rate, number of zones, water and space heating demands. Numbers subject to change.

Meets NAECA Requirements

General

All gas water heaters are certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). All potable water connections are 3/4" NPT (19mm) on 11" (203mm) centers. All heat exchanger connections are 1" NPT (25mm). All gas connections 1/2" (13mm).

All models design certified by CSA International (formerly AGA/CGA), ANSI Z-21.10.3 and peak performance rated.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

Suitable for Water (Potable) Heating and Space Heating.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable water side. The potable side of this unit may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance. The heat exchanger side of the unit may be used in space heating applications.

Customer Service / Sales: 1-866-690-0961 / 905-203-0600
24/7 Technical Support: 800-334-3393 ■ Email techserv@bradfordwhite.com

Built to be the Best®