


Brute® Deluxe

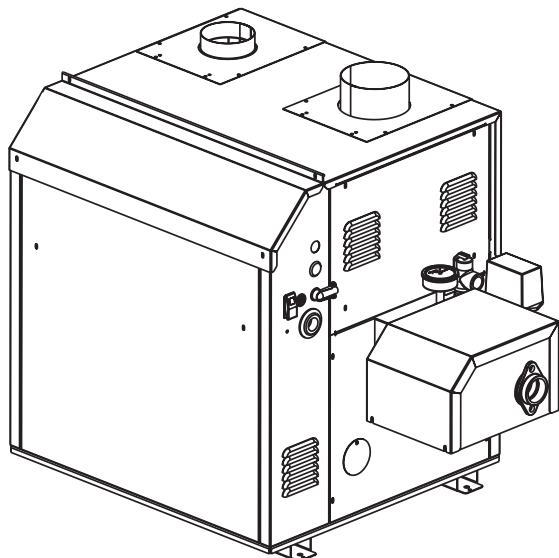

Pump Mounted Boiler & Water Heater

BMT2H	400 Hydronic Heater
BMT2V	200 - 400 Volume Water Heater

Indoor/Outdoor Sizes

Submittal Data



Date:

Project #:

Engineer:

Prepared By:

Bid Date:

Project Name:

Location:

Contractor:

Standard Equipment

- Certified for indoor or outdoor use
- Less than 10ppm NOx
- ASME 160 psi working pressure heat exchanger
- ASME "H" stamp
- Opt. ASME "HLW" stamp (BMT2V only)
- Meets NSF/ANSI-372 Low Lead Content Certification (BMT2V)
- Pump, mounted and wired
- Flanged water connections
- Glass-lined headers
- External header gaskets
- 75psi (517kPa) ASME rated pressure relief valve (BMT2H)
- 125psi (861kPa) ASME rated pressure relief valve (BMT2V)
- Temperature pressure gauge
- Water flow switch
- 24V control system
- 115/24V transformer
- Temperature controller
- Manual reset high limit
- On-off firing (2-stage opt.)
- Hot surface ignition
- On/off toggle switch
- CSD-1 compliant
- Removable burner tray(s)
- Multiple operating gas valve/press regs
- Manual "A" gas valve
- Burner site glass
- Fusible link (model 200)
- Intake air filter
- Built-in fan for Category I or III vent systems
- Blower pre- & post-purge
- Air pressure switch
- Blocked vent switch

Controller Features

BMT2H Boiler

- PI temperature controller
- Outdoor reset with ratios of 0.4 to 3.6
- Warm weather shutdown
- Indicator lights for power, heat call, DHW call & WWSD
- Indirect DHW operation
- Automatic boiler differential
- Pump pre-purge, post-purge and exercise
- Outdoor air sensor
- Codes for sensor errors

BMT2V Water Heater

- Bulb & capillary adjustable temperature controller
- On/off control has fixed 5°F differential
- Opt. 2-stage control is adjustable with fixed 3.5°F switch differential and adjustable interstage differential
- Pump time delay, adjustable from 0-10 minutes

Boiler Data

Model:

- ☐ Boiler BMT2H
☐ Water Heater BMT2V

Configuration

- ☐ On/Off (standard)
☐ Two-Stage (optional)

Water Trim

- ☐ Glass-Lined Cast Iron
☐ Bronze Trim (std. on BMT2V)

Number of Units:

Fuel

- ☐ Natural
☐ Propane

Pump

- ☐ Normal Water
☐ Soft Water (BMT2V only)

Heat Exchanger

- ☐ Copper
☐ Cupro-Nickel
☐ Copper, Reversed
☐ Cupro-Nickel, Reversed

Options

- ☐ 200°F Max Controls (std. on BMT2V)
☐ Low Water Cutoff
☐ ASME "HLW" Stamp (BMT2V only)



Sizing Data

Model	Input		Output		Gas Conn	Water	Shipping	
	BTU/h	kW	BTU/h	kW	Size NPT	Conn. Size NPT	lbs	kg
☐ BMT2H0400	399,000	116.9	340,000	99.6	3/4	1-1/2	350	159
☐ BMT2V0200	199,900	58.6	169,915	49.8	3/4	1-1/2	290	132
☐ BMT2V0300	300,000	87.9	255,000	74.7	3/4	1-1/2	320	145
☐ BMT2V0400	400,000	117.2	339,915	99.6	3/4	1-1/2	350	159

- NOTES:**
- 1. Input and output must be de-rated 4% per 1000 feet above sea level when installed above 2000 feet altitude.
 - 2. Dimensions are nominal.
 - 3. For other boiler ratings:
Boiler Horsepower: $HP = \frac{\text{Output}}{33,475}$ Radiation Surface: $EDR \text{ sq. ft.} = \frac{\text{Output}}{150}$

Accessories

- ☐ Side-wall vent terminal for indoor installation (required for side-wall venting)
- ☐ Side-wall combustion air terminal for indoor installation (required only for ducted combustion air)
- ☐ Outdoor vent terminal and combustion air terminal

Water Flow Data

BMT2H (Boiler) TEMPERATURE RISE								
Size	20°F	11°C	25°F	14°C	30°F	17°C	35°F	19°C
	Flow gpm	Flow lpm	Flow gpm	Flow lpm	Flow gpm	Flow lpm	Flow gpm	Flow lpm
400	34	129	27	102	23	87	19	72

BMT2V (Water Heater)												
Size	HARD WATER				NORMAL WATER				SOFT WATER			
	Flow gpm	Temp Rise °F	Flow lpm	Temp Rise °C	Flow gpm	Temp Rise °F	Flow lpm	Temp Rise °C	Flow gpm	Temp Rise °F	Flow lpm	Temp Rise °C
200	45	8	170	4	35	10	133	6	23	15	87	8
300	45	11	170	6	35	15	133	8	23	22	87	12
400	45	15	170	8	35	19	133	11	23	30	87	17

Recovery Data

WATER TEMPERATURE RISE IN °F									
Size	40°F GPH	50°F GPH	60°F GPH	70°F GPH	80°F GPH	90°F GPH	100°F GPH	120°F GPH	140°F GPH
200	510	408	340	291	255	227	204	170	146
300	765	612	510	437	383	340	306	255	219
400	1020	816	680	583	510	453	408	340	291

NOTE: GPH = gallons per hour.

WATER TEMPERATURE RISE IN °C									
Size	22°C L/h	28°C L/h	33°C L/h	39°C L/h	44°C L/h	50°C L/h	56°C L/h	67°C L/h	78°C L/h
200	1928	1542	1285	1100	964	858	771	643	552
300	2892	2313	1928	1652	1448	1285	1157	964	828
400	3856	3084	2570	2204	1928	1712	1542	1285	1100

NOTE: L/h = Liters per hour.

Clearances

Appliance Surface	Required Clearance from Combustible Material		Suggested Service Access Clearance	
	inches	cm	inches	cm
Left Side	1	2.5	24	61.0
Right Side	1	2.5	24	61.0
Top	1	2.5	12	30.5
Back*	1	2.5	12	30.5
Front	1	2.5	36	91.4
Vertical Vent** (Category 1)	6	15.2		
Horizontal Vent (Category 3)	per UL1738 venting system supplier's instructions			

* When vent and/or combustion air connects to the back, recommended clearance is 36" 91cm.

** 1" when b-vent is used.

Electrical Data


BMT2H & BMT2V (pump mounted) Size	Boiler / Heater Circuit Size			Pump	Blower
	Volts	Phase	Amps		
200–400	120	Single	15	Included in Boiler Connection	Included in Boiler Connection

Pump Data


BMT2V Water Heaters				
Size	Water Category			
	SOFT		NORMAL	
	HP	Amps	HP	Amps
200	1/10	1.5	1/6	2.0
300	1/10	1.5	1/6	2.0
400	1/10	1.5	1/6	2.0

BMT2H Boilers		
Size	HP	Amps
400	1/6	2.0


Dimensional Data

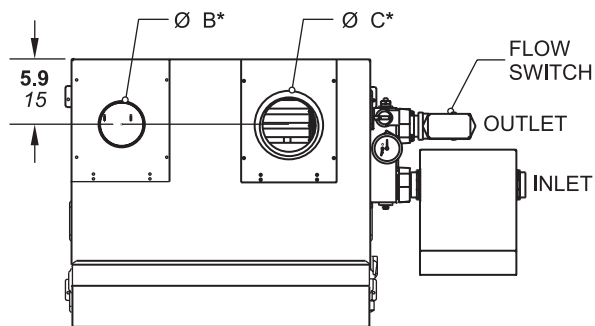


TOP VIEW

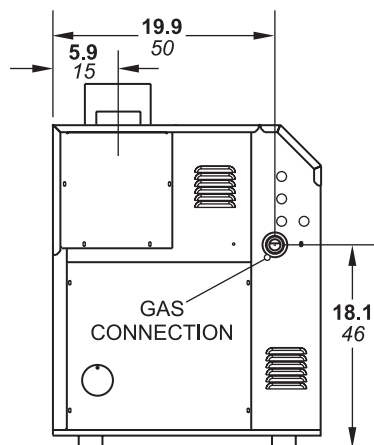


LEFT SIDE VIEW

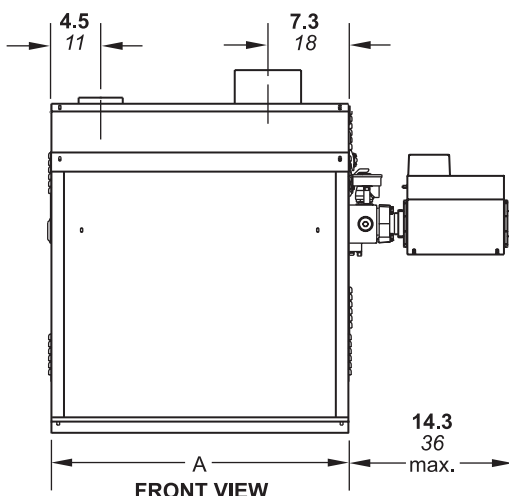

FRONT VIEW

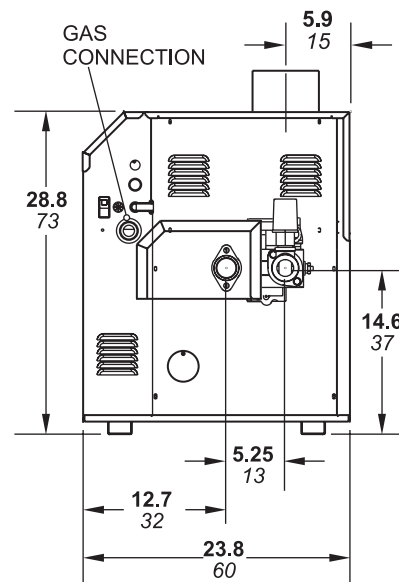

RIGHT SIDE VIEW

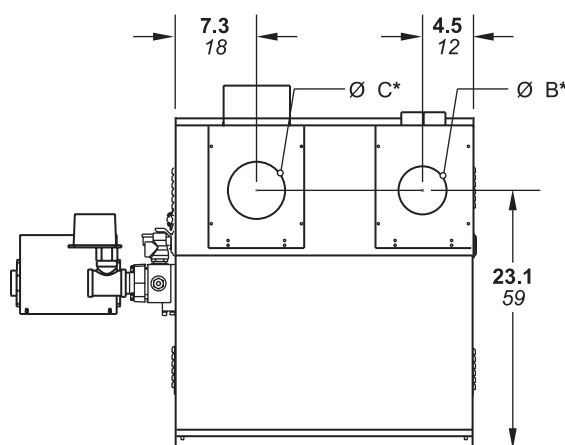

REAR VIEW

Dimensions shown in **inches cm.**

Size	A		Air Conn. B*		Vent Conn. C*		Horiz Vent Pipe	
	in	cm	in	cm	in	cm	in	cm
200	20½	52	4	10	5	13	4	10
300	26½	67	4	10	6	15	5	13
400	33½	85	6	15	7	18	6	15

*Air and vent connections may be on top or back of the Brute Deluxe, and are field convertible.

Bradford White Corporation reserves the right to change specifications, components, features, or to discontinue products without notice.