


Brute

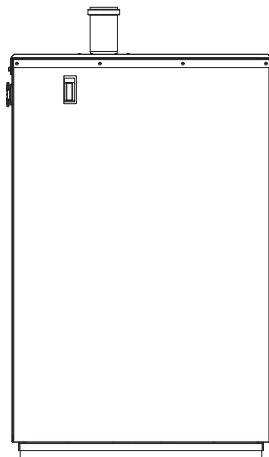

Date:

Project #:

Engineer:

Prepared By:

Bid Date:

Hydronic Boiler

BNTH

Hydronic Boiler

Outdoor Sizes 399-850

Submittal Data



Project Name:

Location:

Contractor:

Standard Equipment

- Meets ANSI Z21.13-2013, section 5.26 boilers for outdoor installations
- Integrated PID temperature and ignition control with large color touchscreen display
- Password-protected parameters for installer use
- Test feature allows forced min or max firing
- Complete diagnostics for analog and digital inputs
- Displays holds, alerts and errors in clear text form
- Dry alarm contacts for ignition failure
- High condensing efficiency
- Modulation down to 20% of full fire (5:1 turndown)
- Sealed combustion chamber
- Pre-mix stainless steel burner
- Low NOx system exceeds the most stringent regulations for air quality - 10 ppm NOx
- Built-in condensate trap
- Vent temperature cutoff feature
- Direct spark ignition system
- Indirect water heater priority
- Sensor for indirect domestic water tank
- 160 psi maximum working pressure
- Stainless steel heat exchanger with welded construction (no gaskets)
- ASME "H" stamp
- 75 psi (517 kPa) ASME rated pressure relief valve
- Water flow switch
- Temperature & pressure gauge
- Drain valve
- Multiple pump control for boiler pump, system pump and indirect domestic water pump, each with delay
- Alarm output
- Accepts external 4-20mA (0-10V with optional convertor) modulation signal
- Outdoor reset with customizable reset curves, domestic hot water override and warm weather shutdown
- Outdoor air temperature sensor
- On/off toggle switch
- Manual reset high limit
- Burner site glass
- Zero clearance to combustible surfaces
- Built-in cascade function for up to eight Brutes.
- 10-year limited warranty

Boiler Data

Number of Units:

Fuel

- ☐ Natural
☐ Propane

Pump Options

- ☐ Pump included
☐ No pump

Factory Mounted Options

- ☐ CSD-1 (covers FM & GAP) (500-850)
☐ Low water cutoff (500-850)
☐ High & Low gas pressure switches (500-850)
☐ Additional auto reset high limit
- ☐ 30 psi pressure relief valve
☐ 50 psi pressure relief valve
☐ 60 psi pressure relief valve
☒ 75 psi pressure relief valve (std)
☐ 125 psi pressure relief valve
☐ 150 psi pressure relief valve
- ☐ Bell for ignition failure



Accessories for Field Mounting

<input type="checkbox"/> Low water cutoff	<input type="checkbox"/> Boiler pump	<input type="checkbox"/> Variable Speed Pump Control
<input type="checkbox"/> 0 - 10V converter for modulation control	<input type="checkbox"/> Propane conversion kit	<input type="checkbox"/> BACnet gateway
<input type="checkbox"/> High & Low gas pressure switches	<input type="checkbox"/> Condensate neutralizer kit	<input type="checkbox"/> LON gateway

Sizing Data

Model	Input		Output		AFUE	Thermal Efficiency %	Comb. Efficiency %	Gas Conn. Size inches	Water Conn. Size inches	Shipping Weight	
	BTU/h	kW	BTU/h	kW						Lbs	kg
<input type="checkbox"/> BNTH 399	399,900	117.2	386,000	113.1	N/A	96.5	96.5	¾ NPT	1¼ NPT	364	165
<input type="checkbox"/> BNTH 500	500,000	146.4	475,000	139.2	N/A	95.0	95.0	1 NPT	1½ NPT	419	190
<input type="checkbox"/> BNTH 600	600,000	175.7	572,000	167.6	N/A	95.3	96.0	1 NPT	1½ NPT	426	193
<input type="checkbox"/> BNTH 750	750,000	219.8	724,000	212.1	N/A	96.6	96.6	1½ NPT	2 NPT	481	218
<input type="checkbox"/> BNTH 850	850,000	248.9	813,000	238.2	N/A	95.7	95.7	1½ NPT	2 NPT	503	228

NOTES:

For other boiler ratings:

Boiler Horsepower: HP = $\frac{\text{Output}}{33,475}$

Radiation Surface: EDR sq. ft. = $\frac{\text{Output}}{150}$

Clearances

Appliance Surface	Suggested Service Access Clearance	
	inches	<i>cm</i>
Left Side	12	<i>31</i>
Right Side	12	<i>31</i>
Top (for flue)	48	<i>122</i>
Back	12	<i>31</i>
Closet, Front	1	<i>2.5</i>
Alcove, Front	24	<i>61</i>
Vent	Per Vent Manufacturer	
Certified by CSA for zero clearance to combustible materials on all sides.		

Electrical Data

Boiler Size MBH	Boiler Circuit		Boiler Pump Circuit		
	399-500	600-850	399	500	600-850
Voltage	120V 1PH	120V 1PH	120V 1PH	120V 1PH	120V 1PH
FLA	< 4 Amps	5 Amps	< 4 Amps	6 Amps	12 Amps
MCA	< 4 Amps	6 Amps	5 Amps	8 Amps	15 Amps
MOP	5 Amps	11 Amps	8 Amps	14 Amps	27 Amps

FLA = Full Load Amperage

MCA = Minimum Circuit Ampacity

MOP = Maximum Over-current Protection

* Note: For any pump(s) exceeding 7.4 FLA / 120V VAC, an external pump relay / contactor must be used. Units that are purchased with pumps include the contactor if the pump exceeds this limit.

Vent System

Size	Intake (Air) Pipe	Exhaust (Vent) Pipe	Maximum Allowable Equivalent Length*	
399	4"	4"	100 ft	30 m
500	4"	4"	100 ft	30 m
600	4"	4"	40 ft	12 m
	6"	6"	100 ft **	30 m **
750	4"	4"	40 ft	12 m
	6"	6"	100 ft	30 m
850	4"	4"	40 ft	12 m
	6"	6"	100 ft	30 m

Installations in the U.S. require exhaust vent pipe that is a combination of PVC & CPVC complying with ANSI/ASTM D1785 F441, polypropylene pipe that complies with ULC S636, or stainless steel complying with UL1738. Installations in Canada require exhaust vent pipe that is certified to ULC S636.

Intake (air) pipe may be ABS, PVC, CPVC or galvanized material.

Installer must comply fully with manufacturer's installation instructions, including use of minimum exhaust length CPVC, to maintain ANSI Z21.13 safety certification.

Closet and alcove installations do not allow the use of PVC under any circumstances

* To calculate max equivalent length, measure the linear feet of the pipe, and add 5 feet (1.5m) for each elbow used.

** Allowed only if the vent pipe is no more than 20 equivalent feet longer than the air pipe.


Water Flow Requirements

		Temperature Rise in °F									
		20°F		30°F		40°F		50°F		60°F	
	Flow	H/L	Flow	H/L	Flow	H/L	Flow	H/L	Flow	H/L	
Size	gpm	feet	gpm	feet	gpm	feet	gpm	feet	gpm	feet	
399	39.0	22.8	25.0	11.5	19.0	7.6	15.2	5.4	12.6	4.0	
500	48.0	22.2	32.0	11.1	24.0	6.8	19.0	4.6	15.8	3.4	
600	58.0	30.5	38.0	14.9	29.0	9.4	22.8	6.3	19.0	4.6	
750	72.0	38.0	48.0	17.5	36.0	10.1	28.5	6.5	23.8	4.6	
850	81.0	34.8	54.0	17.4	41.0	10.9	32.3	7.3	26.9	5.3	

		Temperature Rise in °C									
		11°C		17°C		22°C		28°C		33°C	
	Flow	H/L	Flow	H/L	Flow	H/L	Flow	H/L	Flow	H/L	
Size	lpm	m	lpm	m	lpm	m	lpm	m	lpm	m	
399	147.6	6.9	94.6	3.5	71.9	2.3	57.5	1.6	47.7	1.2	
500	181.7	6.8	121.1	3.4	90.8	2.1	71.9	1.4	59.8	1.0	
600	219.6	9.3	143.8	4.5	109.8	2.9	86.3	1.9	71.9	1.4	
750	272.5	11.6	181.7	5.3	136.3	3.1	107.9	2.0	90.1	1.4	
850	306.6	10.6	204.4	5.3	155.2	3.3	122.3	2.2	101.8	1.6	

Note that pumps supplied with boilers are meant for primary-secondary piping systems, and are sized to serve the boiler and 30 feet of boiler loop piping with a typical number of fittings, for approximately 25-30°F temp rise across the boiler.

Dimensional Data

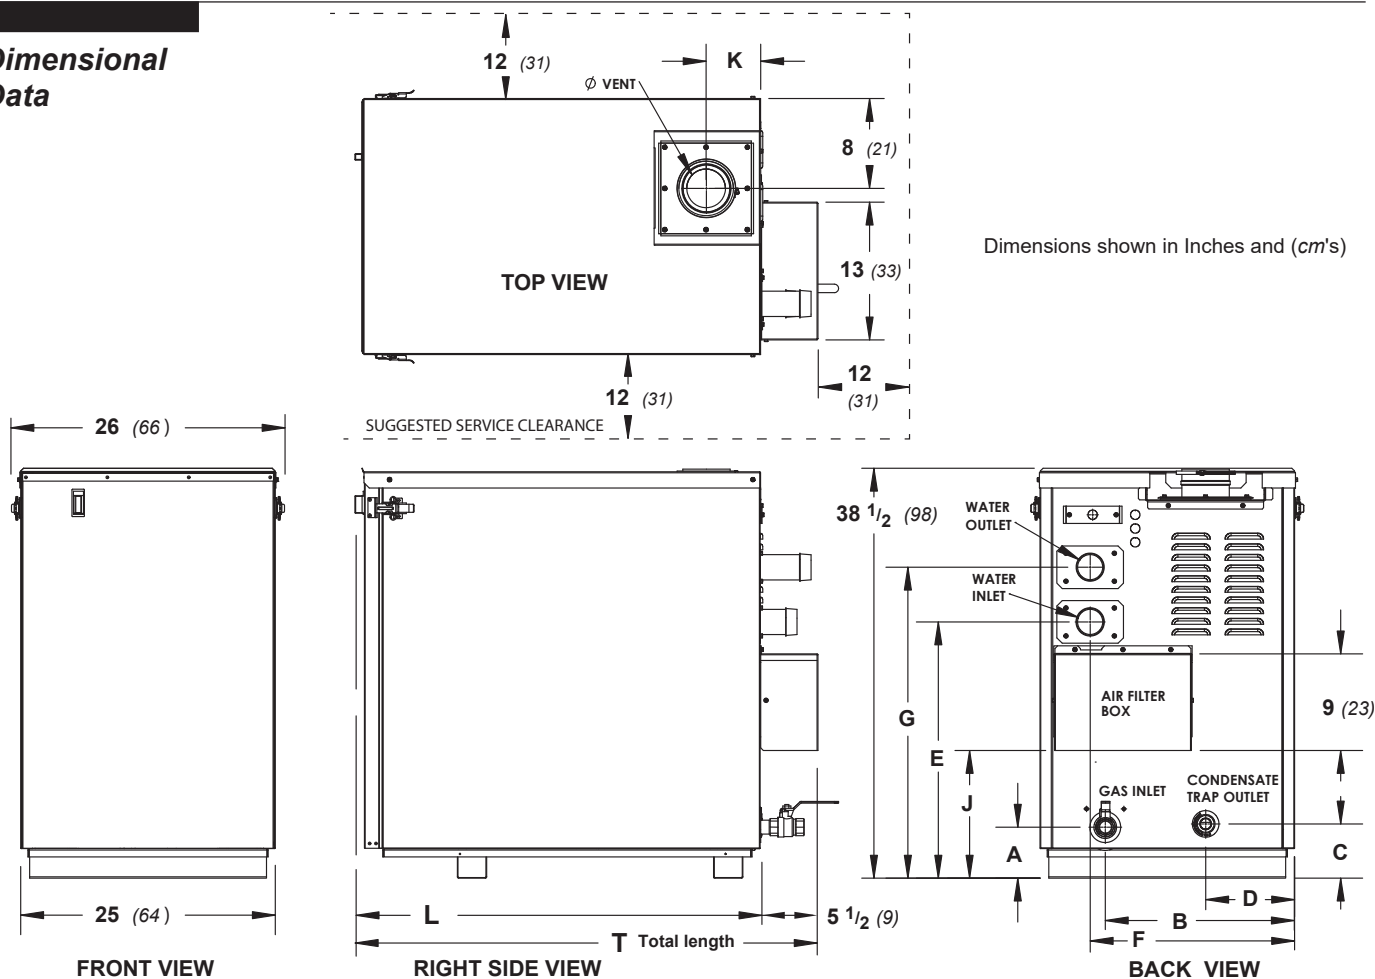

SIZE	A		B		C		D		E	
	in	cm	in	cm	in	cm	in	cm	in	cm
399	8"	15.5	19-1/2"	50	7-3/4"	20	17-1/4"	43.8	24"	61
500	5"	13	17-3/4"	45	5"	13	8-1/4"	21	24"	61
600	33-1/2"	85	3.0"	8	5"	13	8-1/4"	21	24"	61
750	32-3/4"	83.2	3.0"	8	5-1/4"	13.4	17-1/4"	43.8	24"	61
850	32-3/4"	83.2	3.0"	8	5-1/4"	13.4	17-1/4"	43.8	24"	61

The 'BACK VIEW' shown is of a 500 MBH model. All other units will be similar, yet different.

All models are shipped with adapters for the air and vent that accept standard pipe of the proper size and type.

SIZE	F		G		J		K		L (Length)		T (Total Length)		VENT Ø	
	in	cm	in	cm	in	cm	in	cm	in	cm	in	cm	in	cm
399	19"	48	28-1/4"	72	12"	30.5	6"	15.2	31-1/4"	80.5	37-3/4"	96	4	11
500	19"	48	29-1/4"	74	12"	30.5	5.5"	14	38"	96.5	43-1/2"	110.5	4	11
600	19"	48	29-1/4"	74	12"	30.5	5-3/4"	14.6	38"	96.5	43-1/2"	110.5	4	11
750	19"	48	29-1/4"	74	12"	30.5	5-3/4"	14.6	51-1/4"	130	57-3/4"	146.7	6	17
850	19"	48	29-1/4"	74	12"	30.5	5-3/4"	14.6	55-3/4"	141.5	61-1/4"	155.5	6	17

Bradford White Corporation reserves the right to change specifications, components, features, or to discontinue products without notice.



200 Lafayette St.
Middleville, MI 49333
Warranty: (800) 531-2111

www.BradfordWhite.com

Litho in U.S.A. © Bradford White 23-01 Document 1360G-BW