

# Infiniti® L Series

## Tankless Gas Water Heater With Built-in Recirculation Pump

### Features

- **ENERGY STAR® Certified.**
- **Certified Green Product™ by the Green Restaurant Association.**
- **SRT™ Scale Reduction Technology**—Significantly reduces the incidence of scale build-up known to result in poor performance, additional maintenance, and premature component or product failure.
- **STEADISET® Technology**—Virtually eliminates cold water sandwich without the need for an internal buffer tank and recirculation pump.
- **Self-Calibrating Fan and Gas Valve**—Automatically configures air fuel ratio for flue length, gas type, and altitude - without a combustion analyzer.
- **Modulation**—Segmented burner with 22:1 turn down ratio.

### Additional Details

- **Complies with the latest Ultra-Low NOx requirement (14 ng/J NOx limit).**
- **Built-in Digital Control**—Temperature can be adjusted on the front control panel (100-140°F) (38°C-60°C).
- **Active Bypass**—Achieves superior temperature stability (±2°F) (±1°C).
- **External Recirculation Pump Wiring**—Installed. Built-in controls provides precise operation of external recirculation pump with, or without, additional external temperature sensor (Recirculation pump sold separately).
- **Built In Freeze Protection**—Activates automatically when the water heater is plugged in.
- **Pressure Relief Valve**—Included (Integral port).
- **Heat Exchanger**—Primary Copper with Secondary Stainless Steel (316L) heat exchanger helps maximize life and minimize scale build-up.
- **Flushing Condensate Trap.**
- **Optional Condensate Neutralizer Kit**—p/n A2123601.
- **Easy Installation and Service Features:**
  - Top Water Connections – For easy retrofit.
  - Venting Length Up To 280 ft. – Direct vent, power vent, and concentric venting terminations approved. PP, PVC, and CPVC approved venting material (refer to I&O manual for details). 2" (51mm) vent up to 60 ft. (18m) and 3" (76mm) vent up to 280 ft. (85m).
  - Gas Connection Flexibility – 1/2" (13mm), 3/4" (19mm), or 1" (25mm) connections permitted (refer to I&O manual for details).
  - Space Saving Installation – 1 Compact size for tight installations.
  - Easy LP Gas Field Convertibility – Purchase of additional kit NOT required to convert from NG to LP.
- **Easy Installation and Service Features:**
  - Inlet Water Filter – External access for easy maintenance.
  - Built-in Flush Ports – For servicing/de-scaling.



**15-Year Limited Residential Heat Exchanger Warranty / 5-Year Limited Parts Warranty.**

For more information on warranty, please visit [www.bradfordwhite.com](http://www.bradfordwhite.com)

For products installed in USA, Canada, and Puerto Rico. See complete copy of the warranty included with the heater for limitations.

# Infiniti® L Series

## Tankless Gas Water Heater With Built-in Recirculation Pump



### SPECIFICATIONS

NATURAL GAS AND LIQUID PROPANE GAS

These water heaters meet or exceed all or portions of (where applicable) the minimum efficiency requirements of ASHRAE Standard 90.1 (latest edition).

Model Number	Input (BTU/Hr.)		Vent Conn.  in.	GPM Flow Rate at °F Temperature Rise			Uniform Energy Factor  Nat. and LP	Minimum Water Flow  GPM	Maximum Temperature Setting  °F	Approx. Shipping Weight  lbs.
	Nat.	LP		45°F	75°F	90°F				
★ RTG-L-199-N1	9,000 - 199,000	17,000 - 199,000	2	8.7	5.2	4.4	0.95	0.45	140°F	90




  

Model Number	Input (kW)		Vent Conn.  mm.	LPM Flow Rate at °C Temperature Rise			Uniform Energy Factor  Nat. and LP	Minimum Water Flow  LPM	Maximum Temperature Setting  °C	Approx. Shipping Weight  kg.
	Nat.	LP		25°C	41.7°C	50°C				
★ RTG-L-199-N1	2.6 - 58.3	5.0 - 58.3	51	32.9	19.6	16.6	0.95	1.7	60°C	41


Propane (LP) Model is not available for order from the factory. All Natural Gas products shipped can be converted to Propane (LP) without the purchase of an additional kit.

Requires an electrical power supply from a 120VAC 60Hz., properly rated receptacle and must be properly grounded. Power supply cord provided.


★ = ENERGY STAR® Qualified.

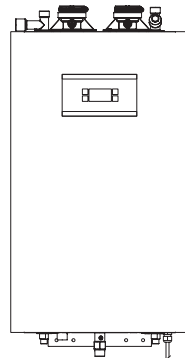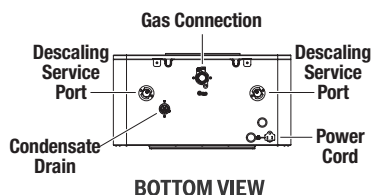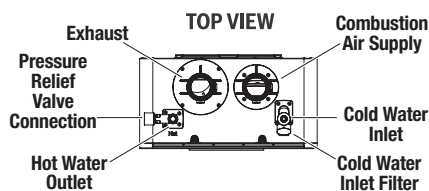


FRONT VIEW




TOP VIEW



BOTTOM VIEW

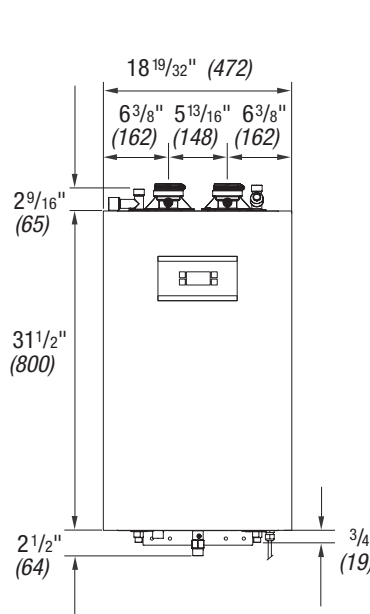

FRONT VIEW

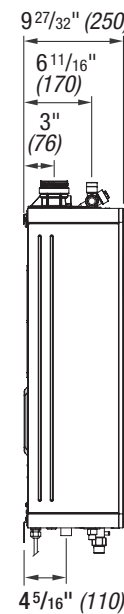

SIDE VIEW

### GENERAL:

\* Where local codes permit. All potable water connections are 3/4" (19mm) NPT. Gas connections are 3/4" (19mm). Bradford White recommends consulting the Installation and Operations Manual (IOM) for proper gas line sizing based upon the installation specifics.

**Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.**

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable side of this system. The potable side may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance.



Customer Service / Sales: 1-866-690-0961 / 905-203-0600

24/7 Technical Support: 800-334-3393 • Email TechServ@bradfordwhite.com

©2025, Bradford White Corporation, USA. All rights reserved.

C1154-0725 CANADA